FLOOD INSURANCE STUDY

FEDERAL EMERGENCY MANAGEMENT AGENCY

VOLUME 1 OF 2



SALINE COUNTY, ARKANSAS

AND INCORPORATED AREAS

COMMUNITY NAME	COMMUNITY NUMBER
ALEXANDER, CITY OF	050377
BAUXITE, TOWN OF	050527
BENTON, CITY OF	050192
BRYANT, CITY OF	050308
HASKELL, CITY OF	050416
SALINE COUNTY, UNINCORPORATED AREAS	050191
SHANNON HILLS, CITY OF	050573
TRASKWOOD, CITY OF	050294



REVISED:

JUNE 5, 2020

FLOOD INSURANCE STUDY NUMBER 05125CV001B

Version Number 2.3.3.2

TABLE OF CONTENTS

Volume 1

		<u>Page</u>
SEC	TION 1.0 – INTRODUCTION	1
1.1	The National Flood Insurance Program	1
1.2	Purpose of this Flood Insurance Study Report	2
1.3	Jurisdictions Included in the Flood Insurance Study Project	2
1.4	Considerations for using this Flood Insurance Study Report	4
SEC	TION 2.0 – FLOODPLAIN MANAGEMENT APPLICATIONS	14
2.1	Floodplain Boundaries	14
2.2	Floodways	20
2.3	Base Flood Elevations	21
2.4	Non-Encroachment Zones	22
2.5	Coastal Flood Hazard Areas 2.5.1 Water Elevations and the Effects of Waves	22 23
	2.5.1 Water Elevations and the Effects of Waves 2.5.2 Floodplain Boundaries and BFEs for Coastal Areas	23
	2.5.3 Coastal High Hazard Areas	23
	2.5.4 Limit of Moderate Wave Action	23
SEC	TION 3.0 – INSURANCE APPLICATIONS	23
3.1	National Flood Insurance Program Insurance Zones	23
SEC	TION 4.0 – AREA STUDIED	24
4.1	Basin Description	24
4.2	Principal Flood Problems	24
4.3		25
4.4	Levees	26
SEC	TION 5.0 – ENGINEERING METHODS	27
5.1	Hydrologic Analyses	27
5.2	Hydraulic Analyses	37
5.3	Coastal Analyses	46
	5.3.1 Total Stillwater Elevations	47 47
	5.3.2 Waves 5.3.3 Coastal Erosion	47
	5.3.4 Wave Hazard Analyses	47
5.4	Alluvial Fan Analyses	47
SEC	TION 6.0 – MAPPING METHODS	48
6.1	Vertical and Horizontal Control	48
6.2	Base Map	49
6.3	Floodplain and Floodway Delineation	50
6.4	Coastal Flood Hazard Mapping	83

6.5	FIRM Revisions 6.5.1 Letters of Map Amendment 6.5.2 Letters of Map Revision Based on Fill 6.5.3 Letters of Map Revision 6.5.4 Physical Map Revisions 6.5.5 Contracted Restudies	83 83 84 84 84
	6.5.6 Community Map History	85
SEC 17.17.2	ION 7.0 – CONTRACTED STUDIES AND COMMUNITY COORDINATION Contracted Studies Community Meetings	87 87 90
SECT	ION 8.0 – ADDITIONAL INFORMATION	91
SECT	ION 9.0 – BIBLIOGRAPHY AND REFERENCES	92
	<u>Figures</u>	
		<u>Page</u>
Figure Figure	1: FIRM Index 2: FIRM Notes to Users 3: Map Legend for FIRM	6 7 10
	4: Floodway Schematic 5: Wave Runup Transect Schematic	21 23
	6: Coastal Transect Schematic	23
Figur	7: Frequency Discharge-Drainage Area Curves	37
_	8: 1% Annual Chance Total Stillwater Elevations for Coastal Areas 9: Transect Location Map	47 47
	Tables	
	<u>rables</u>	<u>Page</u>
	1: Listing of NFIP Jurisdictions	3
	2: Flooding Sources Included in this FIS Report	15
	Flood Zone Designations by Community Basin Characteristics	23 24
	5: Principal Flood Problems	24 24
	6: Historic Flooding Elevations	25
	7: Non-Levee Flood Protection Measures	25
	8: Levees	26
	9: Summary of Discharges	31
	10: Summary of Non-Coastal Stillwater Elevations	37
	11: Stream Gage Information used to Determine Discharges	37
	12: Summary of Hydrologic and Hydraulic Analyses 13: Roughness Coefficients	42 46

Table 14: Summary of Coastal Analyses	46
Table 15: Tide Gage Analysis Specifics	47
Table 16: Coastal Transect Parameters	47
Table 17: Summary of Alluvial Fan Analyses	47
Table 18: Results of Alluvial Fan Analyses	47
Table 19: Countywide Vertical Datum Conversion	48
Table 20: Stream-Based Vertical Datum Conversion	49
Table 21: Base Map Sources	49
Table 22: Summary of Topographic Elevation Data used in Mapping	51
Table 23: Floodway Data	52
Table 24: Flood Hazard and Non-Encroachment Data for Selected Streams	83
Table 25: Summary of Coastal Transect Mapping Considerations	83
Table 26: Incorporated Letters of Map Change	84
Table 27: Community Map History	86
Table 28: Summary of Contracted Studies Included in this FIS Report	87
Table 29: Community Meetings	90
Table 30: Map Repositories	91
Table 31: Additional Information	92
Table 32: Bibliography and References	93

Volume 2

Exhibits

Flood Profiles	<u>Panel</u>
Alum Fork Saline River	01 P
Boswell Creek	02-03 P
Bryant Tributary	04-05 P
Cedar Creek	06-08 P
Clear Creek	09 P
Crooked Creek	10-11 P
Crooked Creek Tributary	12 P
Duck Creek	13-14 P
Fourche Creek	15-16 P
Hope Branch	17 P
Hurricane Creek	18-23 P
Hurricane Creek Tributary 1	24-25 P
Hurricane Creek Tributary 1A	27 P
Little Hurricane Creek	28-29 P
Lorance and Dry Creeks	30-31 P
Maple Creek	32-34 P
Maple Creek Tributary	35 P
McCright Branch	36-37 P
McNeil Creek	38-39 P
Middle Fork Saline River	40-41 P
Mill Creek	42-43 P

Flood Profiles	<u>Panel</u>	
North Fork Saline River	44	Ρ
Otter Creek	45	Ρ
Otter Creek Tributary	46	Ρ
Owen Creek	47-48	Ρ
Saline River	49-50	Ρ
Salt Creek	51-52	Ρ
Shannon Hills Tributary	53	Ρ
Trace Creek	54-56	Ρ
Trailer Park Ditch	57	Ρ
Upper Depot Creek	58	Ρ
Willow Depot Creek	59-61	Ρ

Published Separately

Flood Insurance Rate Map (FIRM)

FLOOD INSURANCE STUDY REPORT

SALINE COUNTY, ARKANSAS

SECTION 1.0 – INTRODUCTION

1.1 The National Flood Insurance Program

The National Flood Insurance Program (NFIP) is a voluntary Federal program that enables property owners in participating communities to purchase insurance protection against losses from flooding. This insurance is designed to provide an alternative to disaster assistance to meet the escalating costs of repairing damage to buildings and their contents caused by floods.

For decades, the national response to flood disasters was generally limited to constructing flood-control works such as dams, levees, sea-walls, and the like, and providing disaster relief to flood victims. This approach did not reduce losses nor did it discourage unwise development. In some instances, it may have actually encouraged additional development. To compound the problem, the public generally could not buy flood coverage from insurance companies, and building techniques to reduce flood damage were often overlooked.

In the face of mounting flood losses and escalating costs of disaster relief to the general taxpayers, the U.S. Congress created the NFIP. The intent was to reduce future flood damage through community floodplain management ordinances, and provide protection for property owners against potential losses through an insurance mechanism that requires a premium to be paid for the protection.

The U.S. Congress established the NFIP on August 1, 1968, with the passage of the National Flood Insurance Act of 1968. The NFIP was broadened and modified with the passage of the Flood Disaster Protection Act of 1973 and other legislative measures. It was further modified by the National Flood Insurance Reform Act of 1994 and the Flood Insurance Reform Act of 2004. The NFIP is administered by the Federal Emergency Management Agency (FEMA), which is a component of the Department of Homeland Security (DHS).

Participation in the NFIP is based on an agreement between local communities and the Federal Government. If a community adopts and enforces floodplain management regulations to reduce future flood risks to new construction and substantially improved structures in Special Flood Hazard Areas (SFHAs), the Federal Government will make flood insurance available within the community as a financial protection against flood losses. The community's floodplain management regulations must meet or exceed criteria established in accordance with Title 44 Code of Federal Regulations (CFR) Part 60, *Criteria for Land Management and Use*.

SFHAs are delineated on the community's Flood Insurance Rate Maps (FIRMs). Under the NFIP, buildings that were built before the flood hazard was identified on the community's FIRMs are generally referred to as "Pre-FIRM" buildings. When the NFIP was created, the U.S. Congress recognized that insurance for Pre-FIRM buildings would be prohibitively expensive if the premiums were not subsidized by the Federal Government. Congress also recognized that most of these floodprone buildings were

built by individuals who did not have sufficient knowledge of the flood hazard to make informed decisions. The NFIP requires that full actuarial rates reflecting the complete flood risk be charged on all buildings constructed or substantially improved on or after the effective date of the initial FIRM for the community or after December 31, 1974, whichever is later. These buildings are generally referred to as "Post-FIRM" buildings.

1.2 Purpose of this Flood Insurance Study Report

This Flood Insurance Study (FIS) Report revises and updates information on the existence and severity of flood hazards for the study area. The studies described in this report developed flood hazard data that will be used to establish actuarial flood insurance rates and to assist communities in efforts to implement sound floodplain management.

In some states or communities, floodplain management criteria or regulations may exist that are more restrictive than the minimum Federal requirements. Contact your State NFIP Coordinator to ensure that any higher State standards are included in the community's regulations.

1.3 Jurisdictions Included in the Flood Insurance Study Project

This FIS Report covers the entire geographic area of Saline County, Arkansas.

The jurisdictions that are included in this project area, along with the Community Identification Number (CID) for each community and the United States Geological Survey (USGS) 8-digit Hydrologic Unit Code (HUC-8) sub-basins affecting each, are shown in Table 1. The FIRM panel numbers that affect each community are listed. If the flood hazard data for the community is not included in this FIS Report, the location of that data is identified.

The location of flood hazard data for participating communities in multiple jurisdictions is also indicated in the table.

Jurisdictions that have no identified SFHAs as of the effective date of this study are indicated in the table. Changed conditions in these communities (such as urbanization or annexation) or the availability of new scientific or technical data about flood hazards could make it necessary to determine SFHAs in these jurisdictions in the future.

Table 1: Listing of NFIP Jurisdictions

		HUC-8	Located on	If Not Included, Location of Flood
Community	CID	Sub-Basin(s)	FIRM Panel(s)	Hazard Data
		, ,	05125C0240E	
Alexander, City of	050377	11110207	05125C0250E	
			05125C0380E	
			05125C0360E	
			05125C0370E	
Bauxite, Town of	050527	08040203	05125C0380E	
			05125C0400E	
			05125C0225E	
			05125C0350E	
D	050400	0004000	05125C0355E	
Benton, City of	050192	08040203	05125C0360E	
			05125C0365E	
			05125C0370E	
			05125C0225E	
	050000	08040203	05125C0240E	
Bryant, City of	050308	11110207	05125C0360E	
			05125C0380E	
			05125C0350E	
			05125C0365E	
Haskell, City of	050416	08040203	05125C0475E	
			05125C0500E	
			05125C0025E	
			05125C0050E	
			05125C0075E	
			05125C0100E	
			05125C0125D1	
			05125C0150E	
			05125C0175E	
			05125C0200E	
		08040102	05125C0225E	
Saline County,		08040203	05125C0240E	
	050191	11110206	05125C0250E	
Unincorporated Areas		11110207	05125C0275D1	
			05125C0300E	
			05125C0325E	
			05125C0350E	
			05125C0355E	
			05125C0360E	
			05125C0365E	
			05125C0370E	
			05125C0380E	
			05125C0400E	

Table 1: Listing of NFIP Jurisdictions (Cont.)

Community	CID	HUC-8 Sub-Basin(s)	Located on FIRM Panel(s)	If Not Included, Location of Flood Hazard Data
Saline County (Unincorporated Areas)	050191	11110207 08040203	05125C0425E 05125C0450E 05125C0475E 05125C0500E 05125C0525E 05125C0550D ¹ 05125C0575D ¹	
Shannon Hills, City of	050573	11110207	05125C0240E 05125C0250E 05125C0380E 05125C0400E	
Traskwood, City of	050294	08040203	05125C0475E	

¹ Panel Not Printed

1.4 Considerations for using this Flood Insurance Study Report

The NFIP encourages State and local governments to implement sound floodplain management programs. To assist in this endeavor, each FIS Report provides floodplain data, which may include a combination of the following: 10-, 4-, 2-, 1-, and 0.2-percent annual chance flood elevations (the 1-percent-annual-chance flood elevation is also referred to as the Base Flood Elevation (BFE)); delineations of the 1-percent-annual-chance and 0.2-percent-annual-chance floodplains; and 1-percent-annual-chance floodway. This information is presented on the FIRM and/or in many components of the FIS Report, including Flood Profiles, Floodway Data tables, Summary of Non-Coastal Stillwater Elevations tables, and Coastal Transect Parameters tables (not all components may be provided for a specific FIS).

This section presents important considerations for using the information contained in this FIS Report and the FIRM, including changes in format and content. Figures 1, 2, and 3 present information that applies to using the FIRM with the FIS Report.

- Part or all of this FIS Report may be revised and republished at any time. In addition, part of this FIS Report may be revised by a Letter of Map Revision (LOMR), which does not involve republication or redistribution of the FIS Report. Refer to Section 6.5 of this FIS Report for information about the process to revise the FIS Report and/or FIRM.
 - It is, therefore, the responsibility of the user to consult with community officials by contacting the community repository to obtain the most current FIS Report components. Communities participating in the NFIP have established repositories of flood hazard data for floodplain management and flood insurance purposes. Community map repository addresses are provided in Table 30, "Map Repositories," within this FIS Report.
- New FIS Reports are frequently developed for multiple communities, such as entire counties. A countywide FIS Report incorporates previous FIS Reports for

individual communities and the unincorporated area of the county (if not jurisdictional) into a single document and supersedes those documents for the purposes of the NFIP.

The initial Countywide FIS Report for Saline County became effective on June 19, 2012. Refer to Table 27 for information about subsequent revisions to the FIRMs.

 Selected FIRM panels for the community may contain information (such as floodways and cross sections) that was previously shown separately on the corresponding Flood Boundary and Floodway Map (FBFM) panels. In addition, former flood hazard zone designations have been changed as follows:


Old Zone	New Zone
A1 through A30	AE
V1 through V30	VE
В	X (shaded)
С	X (unshaded)

• FEMA does not impose floodplain management requirements or special insurance ratings based on Limit of Moderate Wave Action (LiMWA) delineations at this time. The LiMWA represents the approximate landward limit of the 1.5-foot breaking wave. If the LiMWA is shown on the FIRM, it is being provided by FEMA as information only. For communities that do adopt Zone VE building standards in the area defined by the LiMWA, additional Community Rating System (CRS) credits are available. Refer to Section 2.5.4 for additional information about the LiMWA.

The CRS is a voluntary incentive program that recognizes and encourages community floodplain management activities that exceed the minimum NFIP requirements. Visit the FEMA Web site at www.fema.gov/national-flood-insurance-program-community-rating-system or contact your appropriate FEMA Regional Office for more information about this program.


- Previous FIS Reports and FIRMs may have included levees that were accredited
 as reducing the risk associated with the 1-percent-annual-chance flood based on
 the information available and the mapping standards of the NFIP at that time. For
 FEMA to continue to accredit the identified levees, the levees must meet the
 criteria of the Code of Federal Regulations, Title 44, Section 65.10 (44 CFR
 65.10), titled "Mapping of Areas Protected by Levee Systems."
- FEMA has developed a *Guide to Flood Maps* (FEMA 258) and online tutorials to assist users in accessing the information contained on the FIRM. These include how to read panels and step-by-step instructions to obtain specific information. To obtain this guide and other assistance in using the FIRM, visit the FEMA Web site at www.fema.gov/online-tutorials.

The FIRM Index in Figure 1 shows the overall FIRM panel layout within Saline County, and also displays the panel number and effective date for each FIRM panel in the county. Other information shown on the FIRM Index includes community boundaries, flooding sources, watershed boundaries, and USGS HUC-8 codes.

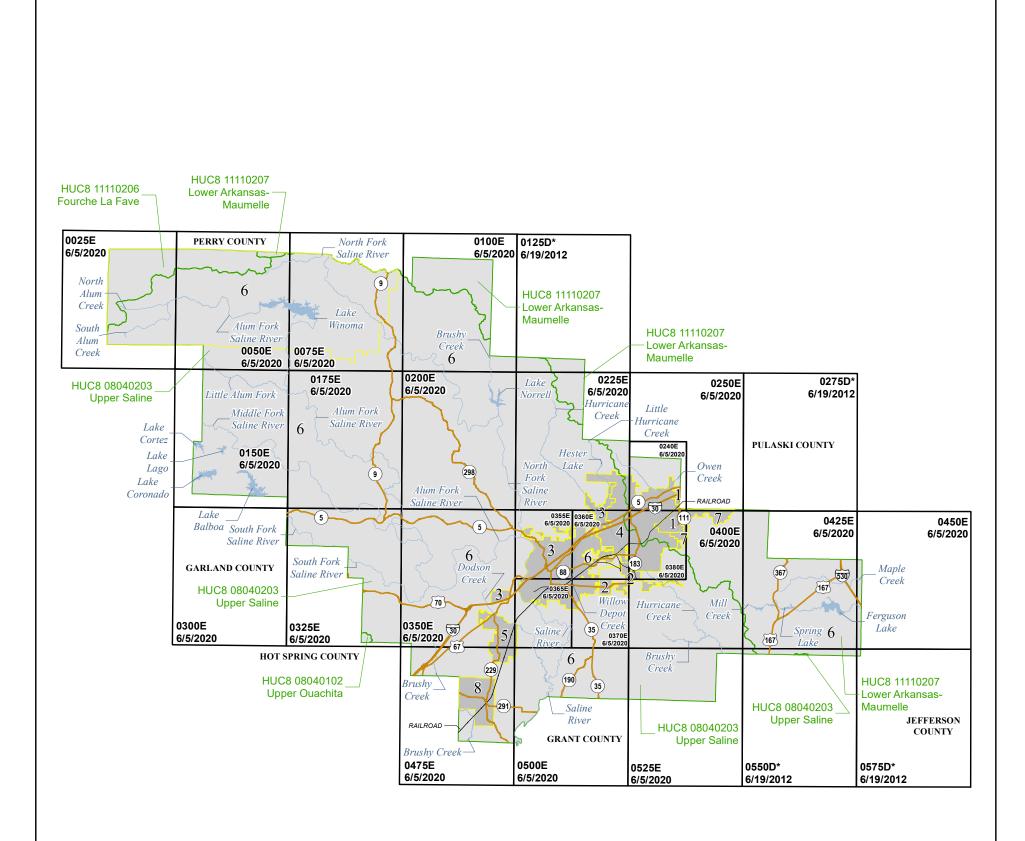

	KEY TO COMMUNITY NAMES & CID	
KEY NUMBER	COMMUNITY NAME	CID
1	ALEXANDER, CITY OF	050377
2	BAUXITE, TOWN OF	050527
3	BENTON, CITY OF	050192
4	BRYANT, CITY OF	050308
5	HASKELL, CITY OF	050416
6	SALINE COUNTY, UNINCORPORATED AREAS	050191
7	SHANNON HILLS, CITY OF	050573
8	TRASKWOOD, CITY OF	050294

ATTENTION: The corporate limits shown on this FIRM Index was based on the best information available at the time of publication. As such, they may be more current than those shown on FIRM panels issued before June 5, 2020.

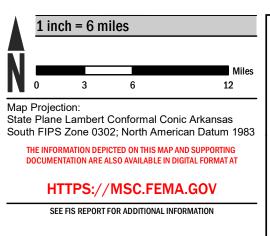

COUNTY LOCATOR

NATIONAL FLOOD INSURANCE PROGRAM

FLOOD INSURANCE RATE MAP INDEX

SALINE COUNTY, ARKANSAS AND INCORPORATED AREAS PANELS PRINTED:

 $0025,\,0050,\,0075,\,0100,\,0150,\,0175,\,0200,\,0225,\,0240,\,0250,\,0300,\\0325,\,0350,\,0355,\,0360,\,0365,\,0370,\,0380,\,0400,\,0425,\,0450,\,0475,\\0500,\,0525$



MAP NUMBER 05125CIND0B MAP REVISED JUNE 5, 2020

* PANEL NOT PRINTED - NO SPECIAL FLOOD HAZARD AREAS

Each FIRM panel may contain specific notes to the user that provide additional information regarding the flood hazard data shown on that map. However, the FIRM panel does not contain enough space to show all the notes that may be relevant in helping to better understand the information on the panel. Figure 2 contains the full list of these notes.

Figure 2: FIRM Notes to Users

NOTES TO USERS

For information and questions about this map, available products associated with this FIRM including historic versions of this FIRM, how to order products, or the National Flood Insurance Program in general, please call the FEMA Map Information eXchange at 1-877-FEMA-MAP (1-877-336-2627) or visit the FEMA Flood Map Service Center website at msc.fema.gov. Available products may include previously issued Letters of Map Change, a Flood Insurance Study Report, and/or digital versions of this map. Many of these products can be ordered or obtained directly from the website. Users may determine the current map date for each FIRM panel by visiting the FEMA Flood Map Service Center website or by calling the FEMA Map Information eXchange.

Communities annexing land on adjacent FIRM panels must obtain a current copy of the adjacent panel as well as the current FIRM Index. These may be ordered directly from the Flood Map Service Center at the number listed above.

For community and countywide map dates, refer to Table 27 in this FIS Report.

To determine if flood insurance is available in the community, contact your insurance agent or call the National Flood Insurance Program at 1-800-638-6620.

The map is for use in administering the NFIP. It may not identify all areas subject to flooding, particularly from local drainage sources of small size. Consult the community map repository to find updated or additional flood hazard information.

BASE FLOOD ELEVATIONS: For more detailed information in areas where Base Flood Elevations (BFEs) and/or floodways have been determined, consult the Flood Profiles and Floodway Data and/or Summary of Non-Coastal Stillwater Elevations tables within this FIS Report. Use the flood elevation data within the FIS Report in conjunction with the FIRM for construction and/or floodplain management.

<u>FLOODWAY INFORMATION</u>: Boundaries of the floodways were computed at cross sections and interpolated between cross sections. The floodways were based on hydraulic considerations with regard to requirements of the National Flood Insurance Program. Floodway widths and other pertinent floodway data are provided in the FIS Report for this jurisdiction.

<u>FLOOD CONTROL STRUCTURE INFORMATION</u>: Certain areas not in Special Flood Hazard Areas may be protected by flood control structures. Refer to Section 4.3 "Non-Levee Flood Protection Measures" of this FIS Report for information on flood control structures for this jurisdiction.

Figure 2. FIRM Notes to Users

<u>PROJECTION INFORMATION</u>: The projection used in the preparation of the map was State Plane Lambert Conformal Conic South FIPS Zone 0302. The horizontal datum was the North American Datum of 1983 NAD83, GRS1980 spheroid. Differences in datum, spheroid, projection or State Plane zones used in the production of FIRMs for adjacent jurisdictions may result in slight positional differences in map features across jurisdiction boundaries. These differences do not affect the accuracy of the FIRM.

<u>ELEVATION DATUM</u>: Flood elevations on the FIRM are referenced to the North American Vertical Datum of 1988. These flood elevations must be compared to structure and ground elevations referenced to the same vertical datum. For information regarding conversion between the National Geodetic Vertical Datum of 1929 and the North American Vertical Datum of 1988, visit the National Geodetic Survey website at www.ngs.noaa.gov.

Local vertical monuments may have been used to create the map. To obtain current monument information, please contact the appropriate local community listed in Table 30 of this FIS Report.

BASE MAP INFORMATION: Base map information shown on the FIRM was derived from U.S. Census Bureau TIGER files, dated 2015, and digital data provided by the Arkansas Geographic Information Office, dated 2015. For information about base maps, refer to Section 6.2 "Base Map" in this FIS Report.

The map reflects more detailed and up-to-date stream channel configurations than those shown on the previous FIRM for this jurisdiction. The floodplains and floodways that were transferred from the previous FIRM may have been adjusted to conform to these new stream channel configurations. As a result, the Flood Profiles and Floodway Data tables may reflect stream channel distances that differ from what is shown on the map.

Corporate limits shown on the map are based on the best data available at the time of publication. Because changes due to annexations or de-annexations may have occurred after the map was published, map users should contact appropriate community officials to verify current corporate limit locations.

NOTES FOR FIRM INDEX

<u>REVISIONS TO INDEX</u>: As new studies are performed and FIRM panels are updated within Saline County, AR, corresponding revisions to the FIRM Index will be incorporated within the FIS Report to reflect the effective dates of those panels. Please refer to Table 27 of this FIS Report to determine the most recent FIRM revision date for each community. The most recent FIRM panel effective date will correspond to the most recent index date.

SPECIAL NOTES FOR SPECIFIC FIRM PANELS

This Notes to Users section was created specifically for Saline County, AR, effective June 05, 2020.

Figure 2. FIRM Notes to Users

<u>FLOOD RISK REPORT</u>: A Flood Risk Report (FRR) may be available for many of the flooding sources and communities referenced in this FIS Report. The FRR is provided to increase public awareness of flood risk by helping communities identify the areas within their jurisdictions that have the greatest risks. Although non-regulatory, the information provided within the FRR can assist communities in assessing and evaluating mitigation opportunities to reduce these risks. It can also be used by communities developing or updating flood risk mitigation plans. These plans allow communities to identify and evaluate opportunities to reduce potential loss of life and property. However, the FRR is not intended to be the final authoritative source of all flood risk data for a project area; rather, it should be used with other data sources to paint a comprehensive picture of flood risk.

Each FIRM panel contains an abbreviated legend for the features shown on the maps. However, the FIRM panel does not contain enough space to show the legend for all map features. Figure 3 shows the full legend of all map features. Note that not all of these features may appear on the FIRM panels in Saline County.

Figure 3: Map Legend for FIRM

SPECIAL FLOOD HAZARD AREAS: The 1% annual chance flood, also known as the base flood or 100-year flood, has a 1% chance of happening or being exceeded each year. Special Flood Hazard Areas are subject to flooding by the 1% annual chance flood. The Base Flood Elevation is the water surface elevation of the 1% annual chance flood. The floodway is the channel of a stream plus any adjacent floodplain areas that must be kept free of encroachment so that the 1% annual chance flood can be carried without substantial increases in flood heights. See note for specific types. If the floodway is too narrow to be shown, a note is shown.

Special Flood Hazard Areas subject to inundation by the 1% annual chance flood (Zones A, AE, AH, AO, AR, A99, V and VE)

Zone A The flood insurance rate zone that corresponds to the 1% annual chance floodplains. No base (1% annual chance) flood elevations (BFEs) or depths are shown within this zone.

Zone AE The flood insurance rate zone that corresponds to the 1% annual chance floodplains. Base flood elevations derived from the hydraulic analyses are shown within this zone.

Zone AH The flood insurance rate zone that corresponds to the areas of 1% annual chance shallow flooding (usually areas of ponding) where average depths are between 1 and 3 feet. Whole-foot BFEs derived from the hydraulic analyses are shown at selected intervals within this zone.

Zone AO The flood insurance rate zone that corresponds to the areas of 1% annual chance shallow flooding (usually sheet flow on sloping terrain) where average depths are between 1 and 3 feet. Average whole-foot depths derived from the hydraulic analyses are shown within this zone.

Zone AR The flood insurance rate zone that corresponds to areas that were formerly protected from the 1% annual chance flood by a flood control system that was subsequently decertified. Zone AR indicates that the former flood control system is being restored to provide protection from the 1% annual chance or greater flood.

Zone A99 The flood insurance rate zone that corresponds to areas of the 1% annual chance floodplain that will be protected by a Federal flood protection system where construction has reached specified statutory milestones. No base flood elevations or flood depths are shown within this zone.

Zone V The flood insurance rate zone that corresponds to the 1% annual chance coastal floodplains that have additional hazards associated with storm waves. Base flood elevations are not shown within this zone.

Zone VE Zone VE is the flood insurance rate zone that corresponds to the 1% annual chance coastal floodplains that have additional hazards associated with storm waves. Base flood elevations derived from the coastal analyses are shown within this zone as static whole-foot elevations that apply throughout the zone.

Regulatory Floodway determined in Zone AE.

Figure 3: Map Legend for FIRM

OTHER AREAS OF FLOOD HAZARD Shaded Zone X: Areas of 0.2% annual chance flood hazards and areas of 1% annual chance flood hazards with average depths of less than 1 foot or with drainage areas less than 1 square mile. Future Conditions 1% Annual Chance Flood Hazard – Zone X: The flood insurance rate zone that corresponds to the 1% annual chance floodplains that are determined based on future-conditions hydrology. No base flood elevations or flood depths are shown within this zone. Area with Reduced Flood Risk due to Levee: Areas where an accredited levee, dike, or other flood control structure has reduced the flood risk from the 1% annual chance flood. Area with Flood Risk due to Levee: Areas where a non-accredited levee, dike, or other flood control structure is shown as providing protection to less than the 1% annual chance flood. OTHER AREAS Zone D (Areas of Undetermined Flood Hazard): The flood insurance rate zone that corresponds to unstudied areas where flood hazards are undetermined, but possible. **NO SCREEN** Unshaded Zone X: Areas of minimal flood hazard. FLOOD HAZARD AND OTHER BOUNDARY LINES Flood Zone Boundary (white line on ortho-photography-based mapping; gray line on vector-based mapping) (ortho) (vector) Limit of Study Jurisdiction Boundary Limit of Moderate Wave Action (LiMWA): Indicates the inland limit of the area affected by waves greater than 1.5 feet **GENERAL STRUCTURES** Aqueduct Channel Channel, Culvert, Aqueduct, or Storm Sewer Culvert Storm Sewer Dam Dam, Jetty, Weir Jetty Weir Levee, Dike, or Floodwall Bridge Bridge

Figure 3: Map Legend for FIRM

REFERENCE MARKERS	}
22.0 •	River mile Markers
CROSS SECTION & TRA	ANSECT INFORMATION
B 20.2	Lettered Cross Section with Regulatory Water Surface Elevation (BFE)
5280 21.1	Numbered Cross Section with Regulatory Water Surface Elevation (BFE)
17.5	Unlettered Cross Section with Regulatory Water Surface Elevation (BFE)
8	Coastal Transect
	Profile Baseline: Indicates the modeled flow path of a stream and is shown on FIRM panels for all valid studies with profiles or otherwise established base flood elevation.
	Coastal Transect Baseline: Used in the coastal flood hazard model to represent the 0.0-foot elevation contour and the starting point for the transect and the measuring point for the coastal mapping.
~~~~ 513 ~~~~	Base Flood Elevation Line
ZONE AE (EL 16)	Static Base Flood Elevation value (shown under zone label)
ZONE AO (DEPTH 2)	Zone designation with Depth
ZONE AO (DEPTH 2) (VEL 15 FPS)	Zone designation with Depth and Velocity
BASE MAP FEATURES  Missouri Creek	River, Stream or Other Hydrographic Feature
234)	Interstate Highway
234	U.S. Highway
(234)	State Highway
234	County Highway
MAPLE LANE	Street, Road, Avenue Name, or Private Drive if shown on Flood Profile
RAILROAD	Railroad

Figure 3: Map Legend for FIRM

	Horizontal Reference Grid Line
_	Horizontal Reference Grid Ticks
+	Secondary Grid Crosshairs
Land Grant	Name of Land Grant
7	Section Number
R. 43 W. T. 22 N.	Range, Township Number
⁴² 76 ^{000m} E	Horizontal Reference Grid Coordinates (UTM)
365000 FT	Horizontal Reference Grid Coordinates (State Plane)
80° 16' 52.5"	Corner Coordinates (Latitude, Longitude)

#### **SECTION 2.0 – FLOODPLAIN MANAGEMENT APPLICATIONS**

#### 2.1 Floodplain Boundaries

To provide a national standard without regional discrimination, the 1-percent-annual-chance (100-year) flood has been adopted by FEMA as the base flood for floodplain management purposes. The 0.2-percent-annual-chance (500-year) flood is employed to indicate additional areas of flood hazard in the community.

Each flooding source included in the project scope has been studied and mapped using professional engineering and mapping methodologies that were agreed upon by FEMA and Saline County as appropriate to the risk level. Flood risk is evaluated based on factors such as known flood hazards and projected impact on the built environment. Engineering analyses were performed for each studied flooding source to calculate its 1-percent-annual-chance flood elevations; elevations corresponding to other floods (e.g. 10-, 4-, 2-, 0.2-percent annual chance, etc.) may have also been computed for certain flooding sources. Engineering models and methods are described in detail in Section 5.0 of this FIS Report. The modeled elevations at cross sections were used to delineate the floodplain boundaries on the FIRM; between cross sections, the boundaries were interpolated using elevation data from various sources. More information on specific mapping methods is provided in Section 6.0 of this FIS Report.

Depending on the accuracy of available topographic data (Table 22), study methodologies employed (Section 5.0), and flood risk, certain flooding sources may be mapped to show both the 1-percent and 0.2-percent-annual-chance floodplain boundaries, regulatory water surface elevations (BFEs), and/or a regulatory floodway. Similarly, other flooding sources may be mapped to show only the 1-percent-annual-chance floodplain boundary on the FIRM, without published water surface elevations. In cases where the 1-percent and 0.2-percent-annual-chance floodplain boundaries are close together, only the 1-percent-annual-chance floodplain boundary is shown on the FIRM. Figure 3, "Map Legend for FIRM", describes the flood zones that are used on the FIRMs to account for the varying levels of flood risk that exist along flooding sources within the project area. Table 2 and Table 3 indicate the flood zone designations for each flooding source and each community within Saline County, respectively.

Table 2, "Flooding Sources Included in this FIS Report," lists each flooding source, including its study limits, affected communities, mapped zone on the FIRM, and the completion date of its engineering analysis from which the flood elevations on the FIRM and in the FIS Report were derived. Descriptions and dates for the latest hydrologic and hydraulic analyses of the flooding sources are shown in Table 12. Floodplain boundaries for these flooding sources are shown on the FIRM (published separately) using the symbology described in Figure 3. On the map, the 1-percent-annual-chance floodplain corresponds to the SFHAs. The 0.2-percent-annual-chance floodplain shows areas that, although out of the regulatory floodplain, are still subject to flood hazards.

Small areas within the floodplain boundaries may lie above the flood elevations but cannot be shown due to limitations of the map scale and/or lack of detailed topographic data. The procedures to remove these areas from the SFHA are described in Section 6.5 of this FIS Report.

Table 2: Flooding Sources Included in this FIS Report

Flooding Source	Community	Downstream Limit	Upstream Limit	HUC-8 Sub- Basin(s)	Length (mi) (streams or coastlines)	Area (mi²) (estuaries or ponding)	Floodway (Y/N)	Zone shown on FIRM	Date of Analysis
Alum Fork Saline River	Saline County, Unincorporated Areas	Confluence with North Fork Saline River and Saline River	Approximately 8,460 feet above confluence with North Fork Saline River and Saline River	08040203	1.60		Y	AE	January 1981
Boswell Creek	City of Bryant	Confluence with Hurricane Creek	Approximately 1.0 miles to just upstream of North Richardson Place	08040203	0.96		N	AE	November 1, 2014
Bryant Tributary	City of Bryant	Confluence with Crooked Creek	Approximately 5,148 feet above confluence with Crooked Creek	11110207	0.98		Y	AE	January 1996
Cedar Creek	Saline County, Unincorporated Areas	Confluence with South Fork Saline River	Lake Coronado County Boundary	08040203	7.93		Y	AE	January 1981
Clear Creek	Saline County, Unincorporated Areas	Approximately 8.14 miles above confluence with Pennington Bayou	Approximately 9.27 miles above confluence with Pennington Bayou	11110207	1.13		Y	AE	April 2000
Crooked Creek	City of Bryant City of Alexander	Confluence with Fourche Creek	Approximately 744 feet upstream of Reynolds Road	11110207	4.67		Y	AE	January 1996
Crooked Creek Tributary	City of Bryant	Confluence with Crooked Creek	Approximately 2,270 feet above confluence with Crooked Creek	11110207	0.43		Y	AE	January 1996

Table 2: Flooding Sources Included in this FIS Report (Continued)

Flooding Source	Community	Downstream Limit	Upstream Limit	HUC-8 Sub- Basin(s)	Length (mi) (streams or coastlines)	Area (mi²) (estuaries or ponding)	Floodway (Y/N)	Zone shown on FIRM	Date of Analysis
Duck Creek	Saline County, Unincorporated Areas	Confluence with Clear Creek	Approximately 560 feet upstream of U.S. Highway 167	11110207	2.91		Y	AE	April 2000
Fourche Creek	Saline County, Unincorporated Areas	Confluence with Arkansas River	Approximately 164 feet upstream of Colonel Glenn Road	11110207	3.25		Y	AE	January 1981
Hope Branch	Saline County, Unincorporated Areas	Confluence with Lorance Creek	Approximately 187 feet upstream of Dena Drive	11110207			Y	AE	April 2000
Hurricane Creek	City of Benton City of Bryant Saline County, Unincorporated Areas	Confluence with Saline River	Approximately 68.1 miles above confluence with Saline River	08040203	6.70		Y	AE	November 1, 2014
Hurricane Creek Tributary 1	City of Benton City of Bryant Saline County, Unincorporated Areas	Confluence with Hurricane Creek	Approximately 2.0 miles to just downstream of Winchester Road	08040203	2.93		N	AE	November 1, 2014
Hurricane Creek Tributary 1A	City of Benton	Confluence with Hurricane Creek Tributary 1	Approximately 265 feet upstream of Bay Meadow Drive	08040203	0.36		N	AE	November 1, 2014
Little Hurricane Creek	City of Benton City of Bryant Saline County, Unincorporated Areas	Confluence with Hurricane Creek	Approximately 12,000 feet above confluence with Hurricane Creek	08040203	2.27		Y	AE	November 1, 2014
Lorance and Dry Creeks	Saline County, Unincorporated Areas	Confluence with Arkansas River	Approximately 20.2 miles above confluence with Arkansas River	11110207	11.2		Y	AE	January 1981

Table 2: Flooding Sources Included in this FIS Report (Continued)

Flooding Source	Community	Downstream Limit	Upstream Limit	HUC-8 Sub- Basin(s)	Length (mi) (streams or coastlines)	Area (mi²) (estuaries or ponding)	Floodway (Y/N)	Zone shown on FIRM	Date of Analysis
Maple Creek	Saline County, Unincorporated Areas	Confluence with Lorance Creek	Approximately 38,000 feet above confluence with Lorance Creek	11110207	5.87		Y	AE	April 2000
Maple Creek Tributary	Saline County, Unincorporated Areas	Confluence with Maple Creek	Approximately 4,650 feet above confluence with Maple Creek	11110207	0.88		Υ	AE	April 2000
McCright Branch	Saline County, Unincorporated Areas	Confluence with Hope Branch	Approximately 8,125 feet above confluence with Hope Branch	11110207	1.53		Y	AE	April 2000
McNeil Creek	City of Benton	Confluence with Saline River	Approximately 9,980 feet above confluence with Saline River	08040203	1.89		Y	AE	March 1980
Middle Fork Saline River	Saline County, Unincorporated Areas	Confluence with Alum Fork Saline River	Approximately 7.1 miles above confluence with Saline River	08040203	7.1		Y	AE	January 1981
Mill Creek	Saline County, Unincorporated Areas	Confluence with Middle Fork Saline River	Approximately 2.2 miles above confluence with Middle Fork Saline River	08040203	2.2		Y	AE	January 1981

Table 2: Flooding Sources Included in this FIS Report (Continued)

Flooding Source	Community	Downstream Limit	Upstream Limit	HUC-8 Sub- Basin(s)	Length (mi) (streams or coastlines)	Area (mi²) (estuaries or ponding)	Floodway (Y/N)	Zone shown on FIRM	Date of Analysis
North Fork Saline River	Saline County, Unincorporated Areas	Confluence with Saline River and Alum Fork Saline River	Approximately 1.95 miles above confluence with Alum Fork Saline River	08040203	1.95		Y	AE	January 1981
Otter Creek	City of Shannon Hills Saline County, Unincorporated Areas	Confluence with Fourche Creek	Approximately 7.2 miles above confluence with Fourche Creek	11110207	2.4		Y	AE	July 1988
Otter Creek Tributary	Saline County, Unincorporated Areas	Confluence with Otter Creek	Approximately 0.6 miles above confluence with Otter Creek	11110207	0.6		Υ	AE	July 1988
Owen Creek	City of Bryant Saline County, Unincorporated Areas	At Pulaski County boundary	Approximately 1,000 feet upstream of Hilldale Road	11110207	4.0		Y	AE	April 2000
Saline River	City of Benton City of Haskell Saline County, Unincorporated Areas	Confluence with Ouachita River	At confluence with Alum Fork Saline River and North Fork Saline River	08040203	22.7		Υ	AE	January 1981
Salt Creek	City of Benton	Confluence with Saline River	Approximately 2,305 feet upstream of Shenandoah Road	08040203	2.7		Y	AE	March 1980
Shannon Hills Tributary	City of Shannon Hills	Confluence with Otter Creek	Approximately 1,454 feet upstream of Joan Drive	11110207	0.7		Y	AE	July 1988

Table 2: Flooding Sources Included in this FIS Report (Continued)

Flooding Source	Community	Downstream Limit	Upstream Limit	HUC-8 Sub- Basin(s)	Length (mi) (streams or coastlines)	Area (mi²) (estuaries or ponding)	Floodway (Y/N)	Zone shown on FIRM	Date of Analysis
Trace Creek	City of Haskell Saline County, Unincorporated Areas	Confluence with Saline River	Approximately 350 feet upstream of U.S. Highway 67	08040203	3.5		Y	AE	October 1, 2015
Trailer Park Ditch	City of Alexander City of Bryant	Confluence with Crooked Creek	At diversion of Crooked Creek	11110207	0.6		Υ	AE	January 1996
Upper Depot Creek	City of Benton	Confluence with Willow Depot Creek	Approximately 5,330 feet above confluence with Willow Depot Creek	08040203	1.0		Υ	AE	March 1980
Willow Depot Creek	City of Benton Saline County, Unincorporated Areas	Confluence with Saline River	Approximately 815 feet upstream of Cary Drive	08040203	4.7		Y	AE	March 1980
All Zone A streams	City of Benton City of Bryant City of Haskell City of Traskwood Saline County, Unincorporated Areas Town of Bauxite	Varies	1 square mile drainage area of all Zone A streams	08040203 11110207	320.5		N	А	October 1, 2015

#### 2.2 Floodways

Encroachment on floodplains, such as structures and fill, reduces flood-carrying capacity, increases flood heights and velocities, and increases flood hazards in areas beyond the encroachment itself. One aspect of floodplain management involves balancing the economic gain from floodplain development against the resulting increase in flood hazard.

For purposes of the NFIP, a floodway is used as a tool to assist local communities in balancing floodplain development against increasing flood hazard. With this approach, the area of the 1-percent-annual-chance floodplain on a river is divided into a floodway and a floodway fringe based on hydraulic modeling. The floodway is the channel of a stream, plus any adjacent floodplain areas, that must be kept free of encroachment in order to carry the 1-percent-annual-chance flood. The floodway fringe is the area between the floodway and the 1-percent-annual-chance floodplain boundaries where encroachment is permitted. The floodway must be wide enough so that the floodway fringe could be completely obstructed without increasing the water surface elevation of the 1-percent-annual-chance flood more than 1 foot at any point. Typical relationships between the floodway and the floodway fringe and their significance to floodplain development are shown in Figure 4.

To participate in the NFIP, Federal regulations require communities to limit increases caused by encroachment to 1.0 foot, provided that hazardous velocities are not produced. Regulations for Arkansas require communities in Saline County to limit increases caused by encroachment to 1.0 foot and several communities have adopted additional restrictions. The floodways in this project are presented to local agencies as minimum standards that can be adopted directly or that can be used as a basis for additional floodway projects.

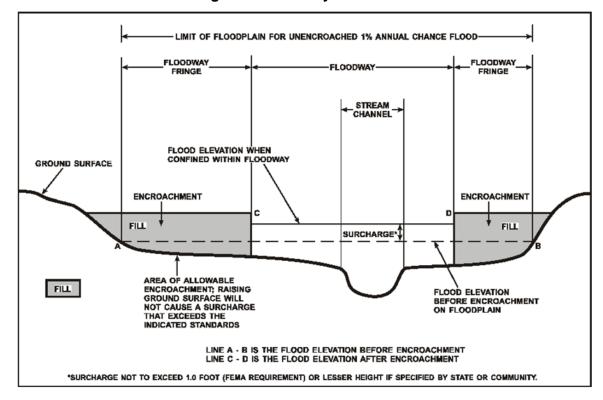


Figure 4: Floodway Schematic

Floodway widths presented in this FIS Report and on the FIRM were computed at cross sections. Between cross sections, the floodway boundaries were interpolated. For certain stream segments, floodways were adjusted so that the amount of floodwaters conveyed on each side of the floodplain would be reduced equally. The results of the floodway computations have been tabulated for selected cross sections and are shown in Table 23, "Floodway Data."

All floodways that were developed for this Flood Risk Project are shown on the FIRM using the symbology described in Figure 3. In cases where the floodway and 1-percent-annual-chance floodplain boundaries are either close together or collinear, only the floodway boundary has been shown on the FIRM. For information about the delineation of floodways on the FIRM, refer to Section 6.3.

#### 2.3 Base Flood Elevations

The hydraulic characteristics of flooding sources were analyzed to provide estimates of the elevations of floods of the selected recurrence intervals. The BFE is the elevation of the 1-percent-annual-chance flood. These BFEs are most commonly rounded to the whole foot, as shown on the FIRM, but in certain circumstances or locations they may be rounded to 0.1 foot. Cross section lines shown on the FIRM may also be labeled with the BFE rounded to 0.1 foot. Whole-foot BFEs derived from engineering analyses that apply to coastal areas, areas of ponding, or other static areas with little elevation change may also be shown at selected intervals on the FIRM.

BFEs are primarily intended for flood insurance rating purposes. Cross sections with

BFEs shown on the FIRM correspond to the cross sections shown in the Floodway Data table and Flood Profiles in this FIS Report. For construction and/or floodplain management purposes, users are cautioned to use the flood elevation data presented in this FIS Report in conjunction with the data shown on the FIRM. For example, the user may use the FIRM to determine the stream station of a location of interest and then use the profile to determine the 1-percent annual chance elevation at that location. Because only selected cross sections may be shown on the FIRM for riverine areas, the profile should be used to obtain the flood elevation between mapped cross sections. Additionally, for riverine areas, whole-foot elevations shown on the FIRM may not exactly reflect the elevations derived from the hydraulic analyses; therefore, elevations obtained from the profile may more accurately reflect the results of the hydraulic analysis.

#### 2.4 Non-Encroachment Zones

Some States and communities use non-encroachment zones to manage floodplain development. For flooding sources with medium flood risk, field surveys are often not collected and surveyed bridge and culvert geometry is not developed. Standard hydrologic and hydraulic analyses are still performed to determine BFEs in these areas. However, floodways are not typically determined, since specific channel profiles are not developed. To assist communities with managing floodplain development in these areas, a "non-encroachment zone" may be provided. While not a FEMA designated floodway, the non-encroachment zone represents that area around the stream that should be reserved to convey the 1-percent-annual-chance flood event. As with a floodway, all surcharges must fall within the acceptable range in the non-encroachment zone.

General setbacks can be used in areas of lower risk (e.g. unnumbered Zone A), but these are not considered sufficient where unnumbered Zone A is replaced by Zone AE. The NFIP requires communities to ensure that any development in a non-encroachment area causes no increase in BFEs. Communities must generally prohibit development within the area defined by the non-encroachment width to meet the NFIP requirement. Regulations for Arkansas require communities in Saline County to limit increases caused by encroachment to 0.5 foot and several communities have adopted additional restrictions for non-encroachment areas.

Non-encroachment determinations may be delineated where it is not possible to delineate floodways because specific channel profiles with bridge and culvert geometry were not developed. Any non-encroachment determinations for this Flood Risk Project have been tabulated for selected cross sections and are shown in Table 24, "Flood Hazard and Non-Encroachment Data for Selected Streams." Areas for which non-encroachment zones are provided show BFEs and the 1-percent-annual-chance floodplain boundaries mapped as zone AE on the FIRM but no floodways.

#### 2.5 Coastal Flood Hazard Areas

This section is not applicable to this Flood Risk Project.

#### 2.5.1 Water Elevations and the Effects of Waves

This section is not applicable to this Flood Risk Project.

#### Figure 5: Wave Runup Transect Schematic

[Not Applicable to This Flood Risk Project]

#### 2.5.2 Floodplain Boundaries and BFEs for Coastal Areas

This section is not applicable to this Flood Risk Project.

#### 2.5.3 Coastal High Hazard Areas

This section is not applicable to this Flood Risk Project.

#### **Figure 6: Coastal Transect Schematic**

[Not Applicable to This Flood Risk Project]

#### 2.5.4 Limit of Moderate Wave Action

This section is not applicable to this Flood Risk Project.

#### **SECTION 3.0 – INSURANCE APPLICATIONS**

#### 3.1 National Flood Insurance Program Insurance Zones

For flood insurance applications, the FIRM designates flood insurance rate zones as described in Figure 3, "Map Legend for FIRM." Flood insurance zone designations are assigned to flooding sources based on the results of the hydraulic or coastal analyses. Insurance agents use the zones shown on the FIRM and depths and base flood elevations in this FIS Report in conjunction with information on structures and their contents to assign premium rates for flood insurance policies.

The 1-percent-annual-chance floodplain boundary corresponds to the boundary of the areas of special flood hazards (e.g. Zones A, AE, V, VE, etc.), and the 0.2-percent-annual-chance floodplain boundary corresponds to the boundary of areas of additional flood hazards.

Table 3 lists the flood insurance zones in Saline County.

Table 3: Flood Zone Designations by Community

Community	Flood Zone(s)
Alexander, City of	AE, X
Bauxite, Town of	A, AE, X
Benton, City of	A, AE, X
Bryant, City of	A, AE, X
Haskell, City of	A, AE, X
Saline County, Unincorporated Areas	A, AE, X

**Table 3: Flood Zone Designations by Community (Continued)** 

Community	Flood Zone(s)
Shannon Hills, City of	AE, X
Traskwood, City of	A, X

#### **SECTION 4.0 – AREA STUDIED**

#### 4.1 Basin Description

Table 4 contains a description of the characteristics of the HUC-8 sub-basins within which each community falls. The table includes the main flooding sources within each basin, a brief description of the basin, and its drainage area.

**Table 4: Basin Characteristics** 

HUC-8 Sub-Basin Name	HUC-8 Sub-Basin Number	Primary Flooding Source	Description of Affected Area	Drainage Area (square miles)
Fourche La Fave	11110206	Fourche La Fave River	Affects only the northwestern corner of Saline County	1,113.90
Lower Arkansas- Maumelle	11110207	Arkansas River	Extends northwest affecting the northeast edge of Saline County	1,126.10
Upper Ouachita	8040102	Ouachita River	Affects only a small area of the southwestern corner of Saline County	1,751.80
Upper Saline	8040203	Saline River	Extends northwest affecting most of Saline County	1,714.10

#### 4.2 Principal Flood Problems

Table 5 contains a description of the principal flood problems that have been noted for Saline County by flooding source.

**Table 5: Principal Flood Problems** 

Flooding Source	Description of Flood Problems
Saline River	Flood event in April of 1927 with a discharge of 110,000 cfs.
Saline River	Flood event in April of 1939 with a discharge of 67,000 cfs.
Saline River	Flood event in April of 1944 with a discharge of 58,000 cfs.
Saline River	Flood event in December of 1953 with a discharge of 49,500 cfs.
Saline River	Flood event in May of 1954 with a discharge of 48,000 cfs.
Saline River	Flood event in May of 1968 with a discharge of 66,000 cfs.
Saline River	Flood event in January of 1969 with a discharge of 100,000 cfs.

**Table 5: Principal Flood Problems (Continued)** 

Flooding Source	Description of Flood Problems			
Saline River	Flood event in September of 1978 with a discharge of 34,000 cfs.			
Saline River	Flood event in December of 1982 with a discharge of 64,700 cfs.			
Saline River	Flood event in October of 1984 with a discharge of 52,500 cfs.			
Saline River	Flood event in November of 1988 with a discharge of 50,600 cfs.			
Saline River	Flood event in March of 1990 with a discharge of 63,600 cfs.			
Saline River	Flood event in December of 1993 with a discharge of 42,300 cfs.			
Saline River	Flood event in February of 1998 with a discharge of 40,600 cfs.			
Saline River	Flood event in September of 2008 with a discharge of 94,800 cfs.			
Saline River	Flood event in December of 2009 with a discharge of 77,200 cfs.			
Saline River	Flood event in November of 2011 with a discharge of 44,400 cfs.			

Table 6 contains information about historic flood elevations in the communities within Saline County.

**Table 6: Historic Flooding Elevations** 

Flooding Source	Location	Historic Peak (Feet NAVD88)	Event Date	Approximate Recurrence Interval (years)	Source of Data
Saline River	Saline County	29.27	2008	N/A	National Weather Service
Saline River	Saline County	29.68	1969	N/A	National Weather Service
Saline River	Saline County	30.50	1927	N/A	National Weather Service

#### 4.3 Non-Levee Flood Protection Measures

Table 7 contains information about non-levee flood protection measures within Saline County such as dams, jetties, and or dikes. Levees are addressed in Section 4.4 of this FIS Report.

**Table 7: Non-Levee Flood Protection Measures** 

Flooding Source	Structure Name	Type of Measure	Location	Description of Measure
Bryant Tributary	Yvonne Dam	Dam	Approximately 120 feet upstream from Mills Park Road	Maintained by Bloomfield Hills P.O.A.

**Table 7: Non-Levee Flood Protection Measures (Continued)** 

Flooding Source	Structure Name	Type of Measure	Location	Description of Measure
Cedar Creek	Coronado Dam	Dam	Approximately 2,300 feet upstream of Minorca Road	Maintained by Hot Springs Village Property Owners Association
Hurricane Creek	Hurricane Lake Dam	Dam	Approximately 2,300 feet upstream of State Highway 5	Maintained by Hurricane Lake Estates Development Company
Hurricane Creek	N/A	Dam	Approximately 1,800 feet downstream of Interstate Highway 30	
Maple Creek	N/A	Dam	Approximately 1,000 feet downstream of Cole Road	

#### 4.4 Levees

This section is not applicable to this Flood Risk Project.

**Table 8: Levees** 

[Not Applicable to This Flood Risk Project]

#### **SECTION 5.0 – ENGINEERING METHODS**

For the flooding sources in the community, standard hydrologic and hydraulic study methods were used to determine the flood hazard data required for this study. Flood events of a magnitude that are expected to be equaled or exceeded at least once on the average during any 10-, 25-, 50-, 100-, or 500-year period (recurrence interval) have been selected as having special significance for floodplain management and for flood insurance rates. These events, commonly termed the 10-, 25-, 50-, 100-, and 500-year floods, have a 10-, 4-, 2-, 1-, and 0.2-percent-annual-chance, respectively, of being equaled or exceeded during any year.

Although the recurrence interval represents the long-term, average period between floods of a specific magnitude, rare floods could occur at short intervals or even within the same year. The risk of experiencing a rare flood increases when periods greater than 1 year are considered. For example, the risk of having a flood that equals or exceeds the 100-year flood (1-percent chance of annual exceedance) during the term of a 30-year mortgage is approximately 26 percent (about 3 in 10); for any 90-year period, the risk increases to approximately 60 percent (6 in 10). The analyses reported herein reflect flooding potentials based on conditions existing in the community at the time of completion of this study. Maps and flood elevations will be amended periodically to reflect future changes.

In addition to these flood events, the "1-percent-plus", or "1%+", annual chance flood elevation has been modeled and included on the flood profile for certain flooding sources in this FIS Report. While not used for regulatory or insurance purposes, this flood event has been calculated to help illustrate the variability range that exists between the regulatory 1-percent-annual-chance flood elevation and a 1-percent-annual-chance elevation that has taken into account an additional amount of uncertainty in the flood discharges (thus, the 1% "plus"). For flooding sources whose discharges were estimated using regression equations, the 1%+ flood elevations are derived by taking the 1-percent-annual-chance flood discharges and increasing the modeled discharges by a percentage equal to the average predictive error for the regression equation. For flooding sources with gage- or rainfall-runoff-based discharge estimates, the upper 84-percent confidence limit of the discharges is used to compute the 1%+ flood elevations.

The engineering analyses described here incorporate the results of previously issued Letters of Map Change (LOMCs) listed in Table 26, "Incorporated Letters of Map Change", which include Letters of Map Revision (LOMRs). For more information about LOMRs, refer to Section 6.5, "FIRM Revisions."

#### 5.1 Hydrologic Analyses

Hydrologic analyses were carried out to establish the peak elevation-frequency relationships for floods of the selected recurrence intervals for each flooding source studied. Hydrologic analyses are typically performed at the watershed level. Depending on factors such as watershed size and shape, land use and urbanization, and natural or man-made storage, various models or methodologies may be applied. A summary of the hydrologic methods applied to develop the discharges used in the hydraulic analyses for

each stream is provided in Table 12. Greater detail (including assumptions, analysis, and results) is available in the archived project documentation.

The analyses reported herein reflect flooding potentials based on conditions existing in the community at the time of completion of this study. Maps and flood elevations will be amended periodically to reflect future changes.

In the FIS for the City of Benton dated June 15, 1981, peak discharges were determined based on drainage areas and topographic information obtained from topographic maps at a scale of 1:24,000 with a contour interval of 10 feet (FEMA 2012).

Synthetic storms were computed to define the discharge-frequency data for McNeil Creek, and Upper Depot Creeks in Benton. Rainfall distributions for the 10-, 2-, and 1-percent-annual-chance frequencies were computed from rainfall-frequency data contained in the National Weather Service Technical Paper No. 40 (FEMA 2012). Snyder's coefficients were used to compute unit hydrographs for the stream. The hydrographs and rainfall distributions were used to compute synthetic storms of the desired frequencies from which the peak discharges were obtained. A Log-Probability relationship of the lower frequency peak discharges was used to compute each of the 0.2-percent-annual chance peak discharges. Recorded gage data for the Saline River was provided by USACE-SWL. In order to obtain the peak flows for the Saline River, an Annual Series Peak Discharge Frequency Curve was drawn using USACE Southwestern Division (SWD) historically weighted skew factors (FEMA 2012).

Hydrologic data for Salt Creek and Willow Depot Creek for the 10-, 2-, 1-, and 0.2-percent-annual-chance frequency flows, were obtained from the Salt Creek, Saline County, Arkansas, and Willow Depot Creek, Saline County, Arkansas Detailed Project Reports (DPR). The DPRs were provided by USACE Vicksburg District (MVK) (FEMA 2012).

In the FIS for the City of Bryant (FEMA 2012), dated January 19, 1996, the peak discharges were calculated using HEC-1 Flood Hydrograph Package program (FEMA 2012) to determine runoff in each stream studied by detailed methods. Precipitation-depth-frequency information for the city was taken from National Weather Service Publications TP-40 (FEMA 2012), TP-49 (FEMA 2012), and Hydro-35 (FEMA 2012)

In the FIS for the City of Shannon Hills (FEMA 2012), dated August 15, 1989, discharges along Otter Creek and Shannon Hills Tributary were determined using unit hydrographs along with appropriate design storms. The design storms were developed from US Weather Bureau Technical Papers 40 and 49 (FEMA 2012). The 0.2-percent-annual-chance discharges were obtained by extrapolating curves obtained from the 10-, 2-, and 1-percent-annual-chance flood discharges. In the 1989 revision of the studies the US Weather Bureau Technical Paper No. 40 rainfall frequency amounts were applied to the HEC-1 model to compute peak runoff. The peak discharge probability values derived from the runoff computations were adjusted for expected probability assuming a 40-year period of record in accordance with a letter from USACE-SWD (letter SWDED-WR dated March 18, 1982; "Expected Probability Adjustments – Synthetic Frequency Curves"). Depth-area-duration studies were conducted for the Otter Creek watershed to determine the critical storm occurrence, and rainfall depths to produce the synthetic peak discharges were obtained from applying rainfall to the HEC-1 model.

For the original FIS for the unincorporated areas of Saline County (FEMA 2012), dated May 17, 1982, peak flood discharges for the Saline River were obtained from streamflow records at the US Geological Survey gage at Benton dating from July 1938. Discharges on the other streams studied in detail were determined by use of unit hydrographs developed at various locations on those streams along with appropriate design storms. The design storms were developed from the US Weather Bureau Technical Papers Nos. 40 and 49 (FEMA 2012). The 0.2-percent-annual-chance discharges were obtained by extrapolating the curves obtained from 10-, 2-, and 1-percent-annual-chance flood discharges. Gaged data and high water marks were used as guides in determining the design profiles.

In the first revision of the Saline County, Unincorporated Areas, FIS dated January 19, 1996, no new hydrologic determinations were made. The discharges were obtained from the original FIS completed by USACE-SWL. Discharges in the split-flow portion of Crooked Creek and Trailer Park Ditch were determined by assuming coincident peaks and summing rating curves at the split points (FEMA 2012)

In the second revision of the Saline County, Unincorporated Areas, FIS dated April 2, 2003, the HEC-1 computer program (FEMA 2012) was used to model the rainfall-runoff process and compute discharge hydrographs at index points along the respective stream reaches. Hypothetical design storms having a triangular, or "balanced," distribution were developed based on depth-duration-frequency data from National Weather Service publications. Rainfall losses due to infiltration were accounted for with the Natural Resources Conservation Service (NRCS) Runoff Curve Number methodology developed by the US Department of Agriculture-NRCS. The Snyder unit hydrograph methodology was utilized to transform the rainfall excess into surface runoff and to generate the discharge hydrographs. Since historical precipitation and streamflow data were unavailable for the respective watersheds and streams analyzed in this study, computed flood flows were assumed to have the same frequency of occurrence as the hypothetical design storm events from which they were generated (FEMA 2012).

The 2020 Saline County PMR includes revisions based on detailed and limited detailed studies completed by the Arkansas Natural Resources Commission (ANRC) as a FEMA Cooperating Technical Partner (CTP).

The hydrologic and hydraulic analyses for portions of Hurricane Creek, Little Hurricane Creek, Boswell Creek, Hurricane Creek Tributary 1, and Hurricane Creek Tributary 1A (CTP FY13 Risk MAP study) were performed by the ANRC for FEMA, under Contract No. EMT-2013-CA-0012, with FEMA Case No. 13-06-1179S. The work was completed in November 2014.

Additional hydrologic and hydraulic analyses for portions of Trace Creek and the approximate flood zones within Saline County (CTP FY14 Risk MAP study) were performed by the ANRC for FEMA, under Contract No. EMW-2014-CA-0163, Case No. 13-06-1179S. The work was completed in October 2015.

Discharges for all reaches in this study were based on design storms computed using the Hydrologic Engineering Center (HEC) – Hydrologic Modeling System (HMS) computer program (Version 3.5).

The SCS Curve Number method, the SCS Unit Hydrograph method, and the Modified

Puls routing method were used to determine the loss-rate, transform rainfall excess into surface runoff, and route the flow through the channel for steady-state simulations. Hydrologic parameters for the models used in this study were obtained from the following sources:

- The terrain data used for this study was the 2014 LiDAR topographical data. This terrain data, along with general storm sewer information, survey data, and current aerial photography, were used to generate the sub-basin delineations.
- Soil data for this study was obtained from the NRCS SSURGO database for Saline County, dated September 2008.
- Rainfall data for this analysis were developed using NOAA HYDRO-35 (for 5min to 60 min intensities), TP-40 (for 0.25 hr to 24 hr intensities), and the published City of Bryant, Storm Water Management Manual dated July 12, 2008.

Discharges for Trace Creek were based on previous hydrologic modeling performed for the City of Haskell as part of an existing project. The study was developed by Flood Plain Services as part of an application for a Letter of Map Revision in 2011. Discharges were based on design storms computed using the Hydrologic Engineering Center (HEC) - Hydrologic Modeling System (HMS) computer program (Version 2.0).

Initial and constant losses, the Snyder's Unit Hydrograph method, and the Lag method were used to determine the loss-rate, transform rainfall excess into surface runoff, and route the flow through the channel for steady state simulations.

Rainfall data for this analysis were developed using NOAA Atlas 14.

Peak discharges for all approximate reaches, except a portion of the Alum Fork Saline River, in this study were computed using the USGS Regional Regression Equations. Arkansas is divided into four hydrologic regions, which are based on drainage boundaries and physiography. Saline County contains portions of hydrologic Regions A, B, and D.

For the Alum Fork Saline River, a gage analysis was performed on USGS Gage 07362587. This gage station has a sufficient period of record (25 years) to perform a flow frequency analysis. A station skew coefficient of -0.52 was developed and utilized in a weighted skew calculation using methods described within USGS Bulletin 17B. Applying the USGS regression calculation at the gage location results in a flow of approximately 18,000 cfs, or within 13% of the gage calculated flow. From this analysis, discharges were interpolated downstream to Lake Winona using a simple drainage area-to-flow ratio.

A summary of the discharges is provided in Table 9. Frequency Discharge-Drainage Area Curves used to develop the hydrologic models may also be shown in

for selected flooding sources. A summary of stillwater elevations developed for non-coastal flooding sources is provided in Table 10. (Coastal stillwater elevations are discussed in Section 5.3 and shown in Table 16.) Stream gage information is provided in Table 11.

**Table 9: Summary of Discharges** 

		Drainage	Peak Discharge (cfs)						
Flooding Source	Location	Area (Square Miles)	10% Annual Chance	4% Annual Chance	2% Annual Chance	1% Annual Chance Existing	1% Annual Chance Future	0.2% Annual Chance	
Boswell Creek	Approximately 200ft downstream of Boone Road	0.40	417	530	625	720	*	851	
	Just upstream of confluence with Hurricane Creeek	0.77	729	942	1,116	1,289	*	1,522	
Bryant Tributary to Crooked Creek	At River Mile 0.05	1.03	*	*	*	2,170	*	*	
Cedar Creek	At River Mile 1.87	12.9	7,560	*	9,780	10,690	*	12,800	
Clear Creek	Approximately 435 feet upstream of U.S. Highway 167	14.29	6,506	*	10,384	11,999	*	16,545	
	Approximately 425 feet upstream of U.S. Highway 167	4.19	2,163	*	2,974	3,336	*	4,369	
Crooked Creek	At River Mile 4.51	3.21	*	*	*	6,100	*	*	
	At State Highway 111	*	9,300	*	12,000	13,400	*	19,000	
Crooked Creek Tributary	At confluence with Crooked Creek	0.31	*	*	*	770	*	*	
Duck Creek	Approximately 150 feet upstream of Spring Lake Road	6.40	4,227	*	6,120	6,907	*	9,094	
	Approximately 300 feet downstream of U.S. Highway 167	*	3,762	*	5,116	5,718	*	7,382	
Fourche Creek	At River Mile 29.0	12.2	6,400	*	8,900	9,825	*	12,000	
Hope Branch	At confluence with McCright Branch	3.19	3,552	*	5,071	5,774	*	7,801	

Table 9: Summary of Discharges (Continued)

		Drainage			Peak Disch	narge (cfs)		
Flooding Source	Location	Area (Square Miles <b>)</b>	10% Annual Chance	4% Annual Chance	2% Annual Chance	1% Annual Chance Existing	1% Annual Chance Future	0.2% Annual Chance
Hope Branch	Approximately 200 feet downstream of Honey Suckle Road	4.08	3,486	*	4,991	5,722	*	7,843
	Approximately 2,000ft downstream of Congo Ferndale Road	5.69	2,064	2,669	3,097	3,530	*	4,601
	Immediately Downstream of Samples Road	11.76	3,614	4,886	5,770	6,688	*	8,965
	Approximately 1,000ft upstream of Zuber Road	13.85	3,711	5,080	6,203	7,023	*	9,776
Hurricane Creek	Hurricane Creek (Upstream of Hurricane Lake)	17.73	5,173	6,910	8,331	9,807	*	14,186
	Hurricane Lake Outfall	24.88	8,952	11,880	14,206	16,603	*	22,662
	Immediately upstream of Interstate 30	28.05	10,769	14,238	16,927	19,684	*	26,582
	Immediately upstream of Boone Road	30.88	10,993	14,318	17,035	19,819	*	27,088
	Immediately upstream of Cynamide Road	34.55	11,220	14,975	17,824	20,682	*	28,554
	Immeditaely upstream of State Highway 183	36.83	10,937¹	14,947¹	17,915	20,938	*	29,401
Hurricane Creek Tributary 1	Approximately 600ft upstream of Heritage Farms Drive	0.26	417	518	604	692	*	793

Table 9: Summary of Discharges (Continued)

		Drainage			Peak Disch	narge (cfs)		
Flooding Source	Location	Area (Square Miles <b>)</b>	10% Annual Chance	4% Annual Chance	2% Annual Chance	1% Annual Chance Existing	1% Annual Chance Future	0.2% Annual Chance
	Immediately upstream of confluence with Hurricanne Creek Tributary 1A	0.55	719	926	1,094	1,268	*	1,487
Hurricane Creek Tributary 1	Approximately 250ft downstream of Shelby Drive	0.78	1,133	1,426	1,674	1,928	*	2,216
	Just upstream of Shady Trail	1.12	1,434	1,806	2,120	2,456	*	2,840
	Just upstream of confluence with Hurricane Creek	2.65	2,016	2,658	3,189	3,747	*	4,652
Lluwissas Crask	Just upstream of Heritage Oak Drive and Subdivision	0.08	211	250	282	317	*	343
Hurricane Creek Tributary 1A	Just upstream of confluence with Hurricane Creek Tributary 1	0.23	441	537	617	702	*	780
Little Huminens	Immediately upstream of Northlake Road	4.11	2,745	3,528	4,151	4,797	*	5,792
Little Hurricane Creek	Little Hurricane Creek (Upstream of Hurricane Lake)	6.59	3,841	5,018	5,961	6,966	*	8,655
Lorance and Dry Creeks	At County Road 215 (Arch Street Pike)	25.2	8,400	*	11,000	12,400	*	14,500
Maple Creek	Approximately 2,400 feet downstream of Maple Creek Road	5.79	1,908	*	2,531	2,807	*	3,566

Table 9: Summary of Discharges (Continued)

		Drainage	Peak Discharge (cfs)						
Flooding Source	Location	Area (Square Miles <b>)</b>	10% Annual Chance	4% Annual Chance	2% Annual Chance	1% Annual Chance Existing	1% Annual Chance Future	0.2% Annual Chance	
Maple Creek	Approximately 200 feet downstream of confluence Maple Creek Tributary	4.53	1,562	*	2,057	2,277	*	2,870	
	Approximately 60 feet upstream of Spring Lake Road	0.79	982	*	1,349	1,511	*	1,963	
Maple Creek	Approximately 2,200 feet upstream of limit of study	1.76	695	*	924	1,026	*	1,287	
Tributary	Approximately 100 feet upstream of U.S. Highway 167	1.37	531	*	688	761	*	951	
McCright Branch	Approximately 120 feet upstream of Pear Orchard Driver	1.28	863	*	1,371	1,603	*	2,294	
	Approximately 540 feet upstream of Dena Road	0.32	578	*	790	882	*	1,141	
	At confluence with Saline River	2.60	2,919	*	3,725	4,113	*	4,700	
	At Woodland Drive	1.77	2,135	*	2,730	3,005	*	3,420	
McNeil Creek	Approximately 240 feet downstream of Interstate 30 Access Road	1.45	1,835	*	2,330	2,575	*	2,925	
	At downstream side of Main Street	1.05	1,467	*	1,851	2,038	*	2,300	
Middle Fork Saline River	At County Road 189	71.9	19,700	*	25,600	28,550	*	34,700	

Table 9: Summary of Discharges (Continued)

		Drainage			Peak Disch	narge (cfs)		
Flooding Source	Location	Area (Square Miles <b>)</b>	10% Annual Chance	4% Annual Chance	2% Annual Chance	1% Annual Chance Existing	1% Annual Chance Future	0.2% Annual Chance
Mill Creek	At confluence with Middle Fork Saline River	10.7	3,100	*	4,450	5,080	*	6,600
North Fork Saline River	At confluence with Alum Fork Saline River and Saline River	139.2	22,330	*	29,450	33,000	*	40,100
Otter Creek	At County Line	7.9	5,900	*	7,475	8,500	*	11,350
Otter Creek Tributary	At confluence with Otter Creek	1.3	1,420	*	1,725	1,960	*	2,825
Owen Creek	Approximately 1,750 feet downstream of Midland Road	5.72	4,450	*	6,143	7,044	*	9,223
Owen Creek	Approximately 100 feet upstream of Hilldale Road	4.45	4,364	*	5,993	6,789	*	8,915
Owen Creek	Approximately 70 feet upstream of Midland Road	2.62	2,925	*	3,994	4,473	*	5,868
Saline River	Gage at Benton – River Mile 198.5	569.0	64,600	*	93,000	104,500	*	130,100
	At confluence with Saline River	3.50	3,145	*	4,014	4,438	*	5,688
Salt Creek	At State Highway 5	2.69	3,546	*	4,521	4,991	*	5,724
	At Shenandoah Road	1.58	2,326	*	2,961	3,273	*	3,685
Shannon Hills Tributary	At confluence with Otter Creek	1.01	660	*	1,200	1,550	*	2,900
	Railroad	3.67	1,840	2,190	2,510	2,810	3,650	3,490
Trace Creek	State Highway 229	3.15	1,780	2,120	2,420	2,700	3,470	3,300
	US Highway 67	2.06	1,630	1,900	2,130	2,340	3,070	2,860
Trailer Park Ditch	At River Mile 0.18	*	*	*	*	1,200	*	*

**Table 9: Summary of Discharges (Continued)** 

		Drainage	Peak Discharge (cfs)								
Flooding Source	Location	Area (Square Miles)	10% Annual Chance	4% Annual Chance	2% Annual Chance	1% Annual Chance Existing	1% Annual Chance Future	0.2% Annual Chance			
Upper Depot	At confluence with	ivilies)	Chance	Charice	Charice	LAISTING	i uture	Charice			
Creek	Willow Depot Creek	1.54	1,703	*	2,179	2,399	*	2,700			
	At confluence with Saline River	8.93	4,995	*	5,986	6,474	*	9,017			
Willow Depot Creek	At Cross-Section V – Missouri Pacific Railroad	7.09	5,435	*	6,943	7,718	*	10,490			
Creek	At Edison Avenue	5.78	5,250	*	6,752	7,488	*	9,537			
	At Cross-Section AH – Missouri Pacific Railroad	2.86	2,589	*	3,351	3,721	*	4,754			

^{*}Not calculated for this Flood Risk Project

¹ Discharges decrease in downstream direction due to large area for flow discharges in overbank

### Figure 7: Frequency Discharge-Drainage Area Curves

[Not Applicable to This Flood Risk Project]

**Table 10: Summary of Non-Coastal Stillwater Elevations** 

		Elevations (feet NAVD88)						
Flooding Source	Location	10% Annual Chance	4% Annual Chance	2% Annual Chance	1% Annual Chance	0.2% Annual Chance		
Lake Balboa	Saline County, Unincorporated Areas	536.9	*	537.7	537.9	538.0		
Lake Coronado	Saline County, Unincorporated Areas	645.5	646.9	647.3	647.6	648.5		
Lake Cortez	Saline County, Unincorporated Areas	633.0	633.8	634.6	635.3	637.3		

^{*}Not calculated for this Flood Risk Project

**Table 11: Stream Gage Information used to Determine Discharges** 

		Agency		Drainage	Period o	f Record
		that		Area		
	Gage	Maintains		(Square		
Flooding Source	Identifier	Gage	Site Name	Miles)	From	То
Alum Fork Saline River	07362587	USGS	Alum Fork Saline River near Reform, AR	27	1990	2014
Alum Fork Saline River	07363000	USGS	Saline River at Benton, AR	550	1938	1981

# 5.2 Hydraulic Analyses

Analyses of the hydraulic characteristics of flooding from the sources studied were carried out to provide estimates of the elevations of floods of the selected recurrence intervals. Base flood elevations on the FIRM represent the elevations shown on the Flood Profiles and in the Floodway Data tables in the FIS Report. Rounded whole-foot elevations may be shown on the FIRM in coastal areas, areas of ponding, and other areas with static base flood elevations. These whole-foot elevations may not exactly reflect the elevations derived from the hydraulic analyses. Flood elevations shown on the FIRM are primarily intended for flood insurance rating purposes. For construction and/or floodplain management purposes, users are cautioned to use the flood elevation data presented in this FIS Report in conjunction with the data shown on the FIRM. The hydraulic analyses for this FIS were based on unobstructed flow. The flood elevations shown on the profiles are thus considered valid only if hydraulic structures remain unobstructed, operate properly, and do not fail.

For the City of Benton FIS, dated June 15, 1981, water surface profiles were computed through use of the USACE HEC-2 step-backwater computer program (FEMA 2012). Starting water surface elevations for the various creeks were determined by computing rating curves for the channel cross-sections at the lower limits of each study. Starting elevations were picked from these curves for the 10-, 2-, 1-, and 0.2-percent annual chance peak discharges. Starting water surface elevations for the Saline River were taken from rating curves at the gage on the river. These gage data were provided by USACE-SWL. The computed profiles were checked for reasonableness by comparing them with existing high-water marks and profiles published in the Benton Flood Plain Information Report (FEMA 2012).

Water surface profiles for Salt Creek and Willow Depot Creek were obtained from the Salt Creek, Saline County, Arkansas, DPR and the Willow Depot Creek, Saline County, Arkansas, DPR, respectively. These reports were provided by USACE-MVK for use in studies for the City of Benton FIS (FEMA 2012).

Below-water sections of channels, bridges, and culverts were surveyed to obtain elevation data and structural geometry. Additional topographic information and overbank elevations on cross-sections were provided by aerial surveys. USACE-SWL and USACE-MVK provided some additional cross-section data for use on the Saline River.

Channel roughness factors (Manning's "n") used in the studies for the City of Benton FIS were chosen by engineering judgment and based on field observations of the streams and flood plain areas. McNeil Creek and Upper Depot Creek have a main channel roughness value of 0.05, with floodplain roughness values ranging from 0.09 to 0.11. The reach of the Saline River adjacent to Benton has main channel roughness values ranging from a high of 0.055 for the 10-percent-annual-chance peak discharge to a low of about 0.040 for the 0.2-percent-annual-chance peak discharge. Floodplain roughness values for the Saline River range from 0.08 to 0.10.

For the City of Bryant FIS water surface elevations for the selected peak discharges were computed using the USACE HEC-2 step-backwater computer program (FEMA 2012). The starting water surface elevation for Crooked Creek was taken from the FIS for Saline County (FEMA 2012). The Bryant Tributary and Crooked Creek Tributary starting water surface elevations were determined assuming coincident peak discharges. Cross-sections for the backwater analyses were field-surveyed. Bridge data were obtained by field surveys and measurements. Channel roughness factors (Manning's "n") used in the hydraulic computations were obtained by engineering judgment, along with field investigation of the streams and floodplain areas. Channel "n" values for Crooked Creek ranged from 0.020 to 0.055; for Crooked Creek Tributary, channel "n" values ranged from 0.045 to 0.055; and for Bryant Tributary, channel "n" values ranged from 0.018 to 0.060. Overbank "n" values ranged from 0.060 to 0.100 for all three streams.

For the City of Shannon Hills FIS dated August 15, 1989, water surface elevations were computed for Otter Creek and Shannon Hills Tributary using the USACE HEC-2 step backwater computer program (FEMA 2012). Starting water surface elevations were determined by normal depth calculations. Channel roughness factors (Manning's "n") used in the analyses were estimated from conditions along the channel and overbank

sections. The channel "n" values for both streams ranged from 0.025 to 0.050, and the overbank "n" values ranged from 0.050 to 0.150.

In the original FIS for the unincorporated areas of Saline County, dated May 17, 1982, cross-sections for streams studied in detail were obtained from field surveys or from surveys previously made for other studies in the county. The Manning's roughness coefficients ("n" values) in the study were estimated from conditions along the channel and overbank sections and range from 0.03 to 0.06 for the channel sections and from 0.06 to 0.15 for the overbank sections. Water surface profiles were computed using the USACE HEC-2 Water Surface Profiles Program (FEMA 2012).

Hydraulic analyses for the first revision of the FIS for the unincorporated areas of Saline County, dated January 19, 1996, consisted of developing the 1-percent-annual-chance water surface profiles for studied streams using the USACE HEC-2 Water Surface Profiles computer program (FEMA 2012). Surveyed cross-sections, with vertical control, and detailed bridge descriptions were obtained for use in the HEC-2 model. Manning's "n" values for overbanks used in the model of existing conditions were 0.075. Channel "n" values ranged from 0.045 to 0.055. The starting water surface elevation for Crooked Creek was taken from the Saline County, Arkansas, study of Crooked Creek. The split flow of Trailer Park Ditch was assumed to occur coincidentally with the Crooked Creek peak discharge.

For the second revision of the FIS for the unincorporated areas of Saline County, dated April 2, 2003, the USACE HEC-RAS computer program (FEMA 2012) was used to compute existing conditions water surface profiles for the 10-, 2-, 1-, and 0.2-percent-annual-chance peak discharges for each of the study reaches. Following development of the existing conditions hydraulic models, the limits of the floodway were defined for the 1-percent-annual-chance peak discharge based on a maximum allowable surcharge of 1.0 foot in the water surface elevation. The surveyed cross-sections, surveyed bridge sections, and bridge descriptions with sketches were obtained during the months of January 1998 through March 1998.

The 2020 current PMR uses the USACE HEC-RAS modeling software, version 4.1.0, to compute steady state existing conditions water surface profiles for the 10%, 4%, 2%, 1%, and 0.2%-annual-chance peak discharges for Boswell Creek, Hurricane Creek, Hurricane Creek Tributary 1, Hurricane Creek Tributary 1A, Little Hurricane Creek, and Trace Creek. Following development of the existing conditions hydraulic models for these study streams, the limits of the floodway were defined for the 1-percent-annual-chance peak discharge based on a maximum allowable surcharge of 1.0 foot in the water surface elevation.

Cross section geometry for the study area was developed using LiDAR data collected in January 2014 by Northrop Grumman for the U.S. Geological Survey. Survey data of the river channel and bridges along with bridge descriptions, including sketches, were obtained during the period from October 2013 to February 2014.

Manning's "n" values were chosen by engineering judgment and based on field observations and aerial photography of the streams and floodplain areas.

Trace Creek, near the City of Haskell, incorporates a previous Letter of Map Revision

(LOMR), dated October 2011. The analysis for this LOMR was performed by Flood Plain Services, and includes a steady state HEC-RAS model. This model was used as the base model for the expanded hydraulic analysis. The study extent of the 2011 LOMR extended from the confluence of an unnamed tributary of Trace Creek up to approximately 2,000 feet upstream of State Highway 229. The final hydraulic model developed as part of the Arkansas Cooperating Technical Partner (CTP) study was extended beyond that of the original LOMR up to US Highway 67. The AR CTP extension was modeled as a Limited-Detail Zone AE study, while the original extent was modeled as a Detailed Zone AE study, including floodway. The floodway for Trace Creek was initially set up using the equal conveyance reduction method. Adjustments were made to encroachments' stationing using engineering judgment to ensure spatially smooth transitions while allowing a maximum surcharge of 1.0 ft.

The LOMR model was also supplemented with more recent 1-meter LiDAR data. Updates to the streamline, cross section stationing, and overbank geometry were made in order to incorporate the newer LiDAR data

Cross section geometry for the entire model was updated and/or developed using LiDAR data collected in January 2014 by Northrop Grumman for the U.S. Geological Survey.

Survey data within the Detailed study reach included existing detailed survey, which were used as is. Survey data for the Limited-Detail study reach of the river channel and bridges along with bridge descriptions, including sketches, were obtained from October 2013 to February 2014.

Manning's "n" values were chosen by engineering judgment and based on field observations and aerial photography of the streams and floodplain areas.

Water surface profiles were generated using RASPLOT. Where available, profiles were plotted at a scale similar to the previous FIS profiles. Where previous FIS profiles were not available, profiles were plotted at a scale similar to other streams of equivalent length and discharge.

For all the approximate study reaches, the USACE HEC-RAS modeling software, version 4.1.0, was used to compute steady state existing conditions water surface profiles for the 10%, 4%, 2%, 1%, 1%-Plus, and 0.2%-annual-chance peak discharges for each of the study reaches. This work was completed in October 2015.

For the approximate study streams, cross section geometry for the study area was developed using LiDAR data collected in January 2014 by Northrop Grumman for the U.S. Geological Survey. Survey data and hydraulic structure information was not included in the modeling per regulatory standards.

For the large reservoirs located within Saline County, information was provided by the Dam Safety & Floodplain Management office of the ANRC. Elevations provided by ANRC were listed in National Geodetic Vertical Datum of 1929 (NGVD29). To convert elevations to the North American Vertical Datum of (NAVD88), a county-wide conversion factor of -0.1 feet was calculated using FEMA guidance. Watershed delineations were completed using Arkansas StreamStats, including the slope used for computing time of concentration. Additional runoff parameters were generated using publicly available

data to develop HEC-HMS models to calculate the water surface elevations for each storm event.

Manning's "n" values were chosen by engineering judgment and based on field observations and aerial photography of the streams and floodplain areas.

All other previous effective detailed study reaches were redelineated on the 2014 LiDAR topographic data.

Water surface profiles (Exhibit 1) were generated using RASPLOT. Where available, profiles were plotted at a scale similar to the previous FIS profiles. Where previous FIS profiles were not available, profiles were plotted at a scale similar to other streams of equivalent length and discharge. For stream segments for which a floodway was computed (Section 6.3), selected cross sections are also listed in Table 23, "Floodway Data."

A summary of the methods used in hydraulic analyses performed for this project is provided in Table 12. Roughness coefficients are provided in Table 13. Roughness coefficients are values representing the frictional resistance water experiences when passing overland or through a channel. They are used in the calculations to determine water surface elevations. Greater detail (including assumptions, analysis, and results) is available in the archived project documentation.

Table 12: Summary of Hydrologic and Hydraulic Analyses

Flooding Source	Study Limits Downstream Limit	Study Limits Upstream Limit	Hydrologic Model or Method Used	Hydraulic Model or Method Used	Date Analyses Completed	Flood Zone on FIRM	Special Considerations
Alum Fork Saline River	Confluence with North Fork Saline River and Saline River	Approximately 8,460 feet above confluence with North Fork Saline River and Saline River	Gage Analysis	HEC-2	January 1981	AE w/ Floodway	Redelineation completed in October 2015 on 2014 LiDAR for 2020 FIS
Boswell Creek	Confluence with Hurricane Creek	Approximately 1.0 miles to just upstream of North Richardson Place	HEC-HMS Version 3.5	HEC-RAS Version 4.1	November 1, 2014	AE	Limited Detailed Study Stream
Bryant Tributary	Confluence with Crooked Creek	Approximately 5,148 feet above confluence with Crooked Creek	HEC-1	HEC-2	January 1996	AE w/ Floodway	Redelineation completed in October 2015 on 2014 LiDAR for 2020 FIS
Cedar Creek	Confluence with South Fork Saline River	Lake Coronado County Boundary	HEC-1	HEC-2	January 1981	AE w/ Floodway	Redelineation completed in October 2015 on 2014 LiDAR for 2020 FIS
Clear Creek	Approximately 8.14 miles above confluence with Pennington Bayou	Approximately 9.27 miles above confluence with Pennington Bayou	HEC-1	HEC-RAS version 2.2	April 2000	AE w/ Floodway	Redelineation completed in October 2015 on 2014 LiDAR for 2020 FIS
Crooked Creek	Confluence with Fourche Creek	Approximately 744 feet upstream of Reynolds Road	HEC-1	HEC-2	January 1996	AE w/ Floodway	Redelineation completed in October 2015 on 2014 LiDAR for 2020 FIS
Crooked Creek Tributary	Confluence with Crooked Creek	Approximately 2,270 feet above confluence with Crooked Creek	HEC-1	HEC-2	January 1996	AE w/ Floodway	Redelineation completed in October 2015 on 2014 LiDAR for 2020 FIS
Duck Creek	Confluence with Clear Creek	Approximately 560 feet upstream of U.S. Highway 167	HEC-1	HEC-RAS version 2.2	April 2000	AE w/ Floodway	Redelineation completed in October 2015 on 2014 LiDAR for 2020 FIS
Fourche Creek	Confluence with Arkansas River	Approximately 164 feet upstream of Colonel Glenn Road	HEC-1	HEC-2	January 1981	AE w/ Floodway	Redelineation completed in October 2015 on 2014 LiDAR for 2020 FIS
Hope Branch	Confluence with Lorance Creek	Approximately 187 feet upstream of Dena Drive	HEC-1	HEC-RAS version 2.2	April 2000	AE	Redelineation completed in October 2015 on 2014 LiDAR for 2020 FIS

Table 12: Summary of Hydrologic and Hydraulic Analyses (Continued)

Flooding Source	Study Limits Downstream Limit	Study Limits Upstream Limit	Hydrologic Model or Method Used	Hydraulic Model or Method Used	Date Analyses Completed	Flood Zone on FIRM	Special Considerations
Hurricane Creek	Confluence with Saline River	Approximately 68.1 miles above confluence with Saline River	HEC-HMS Version 3.5	HEC-RAS Version 4.1	November 1, 2014	AE w/ Floodway	
Hurricane Creek Tributary 1	Confluence with Hurricane Creek	Approximately 2.0 miles to just downstream of Winchester Road	HEC-HMS Version 3.5	HEC-RAS Version 4.1	November 1, 2014	AE	Limited Detailed Study Stream
Hurricane Creek Tributary 1A	Confluence with Hurricane Creek Tributary 1	Approximately 265 feet upstream of Bay Meadow Drive	HEC-HMS Version 3.5	HEC-RAS Version 4.1	November 1, 2014	AE	Limited Detailed Study Stream
Little Hurricane Creek	Confluence with Hurricane Creek	Approximately 12,000 feet above confluence with Hurricane Creek	HEC-HMS Version 3.5	HEC-RAS Version 4.1	November 1, 2014	AE w/ Floodway	Redelineation completed in October 2015 on 2014 LiDAR for 2020 FIS
Lorance and Dry Creeks	Confluence with Arkansas River	Approximately 20.2 miles above confluence with Arkansas River	HEC-1	HEC-2	January 1981	AE w/ Floodway	Redelineation completed in October 2015 on 2014 LiDAR for 2020 FIS
Maple Creek	Confluence with Lorance Creek	Approximately 38,000 feet above confluence with Lorance Creek	HEC-1	HEC-RAS version 2.2	April 2000	AE w/ Floodway	Redelineation completed in October 2015 on 2014 LiDAR for 2020 FIS
Maple Creek Tributary	Confluence with Maple Creek	Approximately 4,650 feet above confluence with Maple Creek	HEC-1	HEC-RAS version 2.2	April 2000	AE w/ Floodway	Redelineation completed in October 2015 on 2014 LiDAR for 2020 FIS
McCright Branch	Confluence with Hope Branch	Approximately 8,125 feet above confluence with Hope Branch	HEC-1	HEC-RAS version 2.2	April 2000	AE w/ Floodway	Redelineation completed in October 2015 on 2014 LiDAR for 2020 FIS
McNeil Creek	Confluence with Saline River	Approximately 9,980 feet above confluence with Saline River	HEC-1	HEC-2	March 1980	AE w/ Floodway	Redelineation completed in October 2015 on 2014 LiDAR for 2020 FIS

Table 12: Summary of Hydrologic and Hydraulic Analyses (Continued)

Flooding Source	Study Limits Downstream Limit	Study Limits Upstream Limit	Hydrologic Model or Method Used	Hydraulic Model or Method Used	Date Analyses Completed	Flood Zone on FIRM	Special Considerations
Middle Fork Saline River	Confluence with Alim Fork Saline River	Approximately 7.1 miles above confluence with Saline River	HEC-1	HEC-2	January 1981	AE w/ Floodway	Redelineation completed in October 2015 on 2014 LiDAR for 2020 FIS
Mill Creek	Confluence with Middle Fork Saline River	Approximately 2.2 miles above confluence with Middle Fork Saline River	HEC-1	HEC-2	January 1981	AE w/ Floodway	Redelineation completed in October 2015 on 2014 LiDAR for 2020 FIS
North Fork Saline River	Confluence with Saline River and Alum Fork Saline River	Approximately 1.95 miles above confluence with North Fork Saline River	HEC-1	HEC-2	January 1981	AE w/ Floodway	Redelineation completed in October 2015 on 2014 LiDAR for 2020 FIS
Otter Creek	Confluence with Fourche Creek	Approximately 7.2 miles above confluence with Fourche Creek	HEC-1	HEC-2	July 1988	AE w/ Floodway	Redelineation completed in October 2015 on 2014 LiDAR for 2020 FIS
Otter Creek Tributary	Confluence with Otter Creek	Approximately 0.6 miles above confluence with Otter Creek	HEC-1	HEC-2	July 1988	AE w/ Floodway	Redelineation completed in October 2015 on 2014 LiDAR for 2020 FIS
Owen Creek	At Pulaski County boundary	Approximately 1,000 feet upstream of Hilldale Road	HEC-1	HEC-RAS version 2.2	April 2000	AE w/ Floodway	Redelineation completed in October 2015 on 2014 LiDAR for 2020 FIS
Saline River	Confluence with Ouachita River	At confluence with Alum Fork Saline River and North Fork Saline River	HEC-1	HEC-2	January 1981	AE w/ Floodway	Redelineation completed in October 2015 on 2014 LiDAR for 2020 FIS
Salt Creek	Confluence with Saline River	Approximately 2,305 feet upstream of Shenandoah Road	HEC-1	HEC-2	March 1980	AE w/ Floodway	Redelineation completed in October 2015 on 2014 LiDAR for 2020 FIS
Shannon Hills Tributary	Confluence with Otter Creek	Approximately 1,454 feet upstream of Joan Drive	HEC-1	HEC-2	July 1988	AE w/ Floodway	Redelineation completed in October 2015 on 2014 LiDAR for 2020 FIS

Table 12: Summary of Hydrologic and Hydraulic Analyses (Continued)

Flooding Source	Study Limits Downstream Limit	Study Limits Upstream Limit	Hydrologic Model or Method Used	Hydraulic Model or Method Used	Date Analyses Completed	Flood Zone on FIRM	Special Considerations
Trace Creek	Confluence with Saline River	Approximately 5,330 feet above confluence with Saline River	HEC-1	HEC-RAS Version 4.1	October 1, 2015	AE w/ Floodway	Redelineation completed in October 2015 on 2014 LiDAR for 2020 FIS
Trailer Park Ditch	Confluence with Crooked Creek	At diversion with Crooked Creek	HEC-1	HEC-2	January 1996	AE	Redelineation completed in October 2015 on 2014 LiDAR for 2020 FIS
Upper Depot Creek	Confluence with Saline River	Approximately 815 feet upstream of Gary Drive	HEC-1	HEC-2	March 1980	AE	Redelineation completed in October 2015 on 2014 LiDAR for 2020 FIS
Willow Depot Creek	Confluence with Saline River	Approximately 815 feet upstream of Gary Drive	HEC-1	HEC-2	March 1980	AE	Redelineation completed in October 2015 on 2014 LiDAR for 2020 FIS
Zone A Studies	Varies	Varies	USGS Regression Equations	HEC-RAS Version 4.1	October 1, 2015	А	Countywide model-backed Zone A streams

**Table 13: Roughness Coefficients** 

Flooding Source	Channel "n"	Overbank "n"
Bryant Tributary	0.018 - 0.060	0.060 - 0.100
Boswell Creek	0.030 - 0.040	0.011 - 0.100
Cedar Creek	0.030 - 0.060	0.060 - 0.150
Clear Creek	0.040 - 0.060	0.100 - 0.110
Clear Creek	0.040 - 0.060	0.100 - 0.110
Crooked Creek	0.020 - 0.055	0.060 - 0.100
Crooked Creek Tributary	0.045 - 0.055	0.018 - 0.060
Duck Creek	0.035 - 0.060	0.050 - 0.110
Fourche Creek	0.030 - 0.060	0.060 - 0.150
Hope Branch	0.040 - 0.045	0.100 - 0.120
Hurricane Creek	0.025 - 0.045	0.011 – 0.10
Hurricane Creek Tributary 1	0.035 - 0.050	0.011 – 0.10
Hurricane Creek Tributary 1A	0.040 - 0.045	0.045 - 0.08
Little Hurricane Creek	0.025 - 0.045	0.011 – 0.100
Lorance and Dry Creeks	0.030 - 0.060	0.0600150
Maple Creek	0.025 - 0.060	0.040 - 0.110
Maple Creek Tributary	0.040 - 0.050	0.100 – 0.110
McCright Branch	0.0415 - 0.050	0.080 - 0.120
McNeil Creek	0.050	0.090 - 0.110
Middle Fork Saline River	0.030 - 0.060	0.060 - 0.150
Mill Creek	0.030 - 0.060	0.060 - 0.150
North Fork Saline River	0.030 - 0.060	0.060 - 0.150
Otter Creek	0.025 - 0.050	0.050 - 0.150
Otter Creek Tributary	0.030 - 0.060	0.060 - 0.150
Saline River	0.040 - 0.055	0.080 - 0.100
Salt Creek	0.030 - 0.060	0.060 - 0.150
Shannon Hills Tributary	0.025 - 0.050	0.050 - 0.150
Trailer Park Ditch	0.030 - 0.060	0.060 - 0.150
Trace Creek	0.045 - 0.050	0.040 - 0.120
Upper Depot Creek	0.050	0.090 - 0.110
Willow Depot Creek	0.030 - 0.060	0.060 - 0.150
Saline River	0.040 - 0.055	0.080 - 0.100
Zone A Studies	0.030 - 0.060	0.050 - 0.120

# 5.3 Coastal Analyses

This section is not applicable to this Flood Risk Project

**Table 14: Summary of Coastal Analyses** 

[Not applicable to this Flood Risk Project]

#### 5.3.1 Total Stillwater Elevations

This section is not applicable to this Flood Risk Project

# Figure 8: 1% Annual Chance Total Stillwater Elevations for Coastal Areas

[Not applicable to this Flood Risk Project]

# **Table 15: Tide Gage Analysis Specifics**

[Not applicable to this Flood Risk Project]

#### **5.3.2 Waves**

This section is not applicable to this Flood Risk Project

#### 5.3.3 Coastal Erosion

This section is not applicable to this Flood Risk Project

# 5.3.4 Wave Hazard Analyses

This section is not applicable to this Flood Risk Project

#### **Table 16: Coastal Transect Parameters**

[Not applicable to this Flood Risk Project]

#### **Figure 9: Transect Location Map**

[Not applicable to this Flood Risk Project]

# 5.4 Alluvial Fan Analyses

This section is not applicable to this Flood Risk Project

#### **Table 17: Summary of Alluvial Fan Analyses**

[Not applicable to this Flood Risk Project]

# Table 18: Results of Alluvial Fan Analyses

[Not applicable to this Flood Risk Project]

#### **SECTION 6.0 – MAPPING METHODS**

#### 6.1 Vertical and Horizontal Control

All FIS Reports and FIRMs are referenced to a specific vertical datum. The vertical datum provides a starting point against which flood, ground, and structure elevations can be referenced and compared. Until recently, the standard vertical datum used for newly created or revised FIS Reports and FIRMs was the National Geodetic Vertical Datum of 1929 (NGVD29). With the completion of the North American Vertical Datum of 1988 (NAVD88), many FIS Reports and FIRMs are now prepared using NAVD88 as the referenced vertical datum.

Flood elevations shown in this FIS Report and on the FIRMs are referenced to NAVD88. These flood elevations must be compared to structure and ground elevations referenced to the same vertical datum. For information regarding conversion between NGVD29 and NAVD88 or other datum conversion, visit the National Geodetic Survey website at <a href="https://www.ngs.noaa.gov">www.ngs.noaa.gov</a>.

Temporary vertical monuments are often established during the preparation of a flood hazard analysis for the purpose of establishing local vertical control. Although these monuments are not shown on the FIRM, they may be found in the archived project documentation associated with the FIS Report and the FIRMs for this community. Interested individuals may contact FEMA to access these data.

To obtain current elevation, description, and/or location information for benchmarks in the area, please visit the NGS website at www.ngs.noaa.gov.

The datum conversion locations and values that were calculated for Saline County are provided in Table 19.

**Table 19: Countywide Vertical Datum Conversion** 

Quadrangle Name	Quadrangle Corner	Latitude	Longitude	Conversion from NGVD29 to NAVD88 (feet)
Alexander	SE	34.625	-92.375	-0.15
Aplin	SE	34.875	-92.875	0.00
Benton	SE	34.50	-92.50	-0.11
Bryant	SE	34.50	-92.375	-0.16
Congo	SE	34.625	-92.50	-0.11
Fourche SW	SE	34.75	-92.625	-0.06
Goosepond Mountain	SE	34.625	-92.875	-0.02
Haskell	SE	34.50	-92.625	-0.07
Jessieville	SE	34.625	-93.00	0.02

**Table 19: Countywide Vertical Datum Conversion (Continued)** 

Quadrangle Name	Quadrangle Corner	Latitude	Longitude	Conversion from NGVD29 to NAVD88 (feet)			
Lake Norrell	SE	34.625	-92.625	-0.08			
Lonsdale	SE	34.50	-92.75	-0.04			
Lonsdale NE	SE	34.625	-92.75	-0.05			
Martindale	SE	34.875	-92.625	-0.10			
Nimrod	SE	34.875	-93.00	0.04			
Nimrod SE	SE	34.75	-93.00	0.02			
Paron	SE	34.75	-92.75	-0.06			
Paron SW	SE	34.75	-92.875	-0.01			
Spring Lake	SE	34.50	-92.25	-0.20			
Thornburg	SE	34.875	-92.75	-0.06			
Average Conversion from NGVD29 to NAVD88 = -0.1 feet							

Table 20: Stream-Based Vertical Datum Conversion

[Not applicable to this flood risk project]

# 6.2 Base Map

The FIRMs and FIS Report for this project have been produced in a digital format. The flood hazard information was converted to a Geographic Information System (GIS) format that meets FEMA's FIRM Database specifications and geographic information standards. This information is provided in a digital format so that it can be incorporated into a local GIS and be accessed more easily by the community. The FIRM Database includes most of the tabular information contained in the FIS Report in such a way that the data can be associated with pertinent spatial features. For example, the information contained in the Floodway Data table and Flood Profiles can be linked to the cross sections that are shown on the FIRMs. Additional information about the FIRM Database and its contents can be found in FEMA's *Guidelines and Standards for Flood Risk Analysis and Mapping*, <a href="https://www.fema.gov/media-library/resources-documents/collections/361">www.fema.gov/media-library/resources-documents/collections/361</a>.

Base map information shown on the FIRM was derived from the sources described in Table 21.

**Table 21: Base Map Sources** 

Data Type	Data Provider	Data Date	Data Scale	Data Description
Political boundaries	Arkansas Geographic Information Office	2015	1:24,000	Municipal and county boundaries

**Table 21: Base Map Sources (Continued)** 

Data Type	Data Provider	Data Date	Data Scale	Data Description
Transportation Features	U.S. Department of Commerce	2015	1:24,000	TIGER Files, Road, airports, and railroads
Surface Water Features	USGS	2006	1:24,000	Streams, rivers, and lakes were derived from NHD data
Panel Extents	USGS	1989	1:24,000	FIRM Panels
Public Land Survey System (PLSS)	NFHL	2015	1:24,000	PLSS Township, Range, and Area information

# 6.3 Floodplain and Floodway Delineation

The FIRM shows tints, screens, and symbols to indicate floodplains and floodways as well as the locations of selected cross sections used in the hydraulic analyses and floodway computations.

For riverine flooding sources, the mapped floodplain boundaries shown on the FIRM have been delineated using the flood elevations determined at each cross section; between cross sections, the boundaries were interpolated using the topographic elevation data described in Table 22.

In cases where the 1-percent and 0.2-percent-annual-chance floodplain boundaries are close together, only the 1-percent-annual-chance floodplain boundary has been shown. Small areas within the floodplain boundaries may lie above the flood elevations but cannot be shown due to limitations of the map scale and/or lack of detailed topographic data.

The floodway widths presented in this FIS Report and on the FIRM were computed for certain stream segments on the basis of equal conveyance reduction from each side of the floodplain. Floodway widths were computed at cross sections. Between cross sections, the floodway boundaries were interpolated. Table 2 indicates the flooding sources for which floodways have been determined. The results of the floodway computations for those flooding sources have been tabulated for selected cross sections and are shown in Table 23, "Floodway Data."

Certain flooding sources may have been studied that do not have published BFEs on the FIRMs, or for which there is a need to report the 1-percent-annual-chance flood elevations at selected cross sections because a published Flood Profile does not exist in this FIS Report. These streams may have also been studied using methods to determine non-encroachment zones rather than floodways. For these flooding sources, the 1-percent-annual-chance floodplain boundaries have been delineated using the flood elevations determined at each cross section; between cross sections, the boundaries were interpolated using the topographic elevation data described in Table 22. All topographic data used for modeling or mapping has been converted as necessary to NAVD88. The 1-percent-annual-chance elevations for selected cross sections along these flooding sources, along with their non-encroachment widths, if calculated, are shown in Table 24, "Flood Hazard and Non-Encroachment Data for Selected Streams."

Table 22: Summary of Topographic Elevation Data used in Mapping

		Source for Topographic E	evation Data			
Community	Flooding Source	Description	Vertical Accuracy	Horizontal Accuracy	Citation	
City of Alexander City of Benton City of Bryant City of Haskell City of Traskwood Saline County, Unincorporated Areas Town of Bauxite	All within Saline County	Light Detection and Ranging data (LiDAR)	18.5cm RMSEz	1 meter at 95% confidence level	USGS 2014	

BFEs shown at cross sections on the FIRM represent the 1-percent-annual-chance water surface elevations shown on the Flood Profiles and in the Floodway Data tables in the FIS Report. Rounded whole-foot elevations may be shown on the FIRM in coastal areas, areas of ponding, and other areas with static base flood elevations.

**Table 23: Floodway Data** 

LOCATION		FLOODWAY			1% ANNUAL CHANCE FLOOD WATER SURFACE ELEVATION (FEET NAVD88)			
CROSS SECTION	DISTANCE ¹	WIDTH ( <b>FEET</b> )	SECTION AREA (SQ. FEET)	MEAN VELOCITY ( <b>FEET/ SEC</b> )	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
Α	5,280	1,949	22,701	3.7	302.1	302.1	303.1	1.0

¹Feet above confluence with Saline River and North Fork Saline River

TABLE	FEDERAL EMERGENCY MANAGEMENT AGENCY	FLOODWAY DATA
E 23	SALINE COUNTY, ARKANSAS  AND INCORPORATED AREAS	FLOODING SOURCE: ALUM FORK SALINE RIVER

LOCATION		FLOODWAY		1% ANNUAL CHANCE FLOOD WATER SURFACE ELEVATION (FEET NAVD88)			RFACE	
CROSS SECTION	DISTANCE ¹	WIDTH (FEET)	SECTION AREA (SQ. FEET)	MEAN VELOCITY (FEET/ SEC)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
A B C	2,112 3,168 5,122	65 70 224	405 255 136	5.4 1.6 1.3	360.5 367.7 392.1	360.5 367.7 392.1	361.1 368.6 392.9	0.6 0.9 0.8

¹Feet above confluence with Crooked Creek

TAE	FEDERAL EMERGENCY MANAGEMENT AGENCY	FLOODWAY DATA
	SALINE COUNTY, ARKANSAS	
23	AND INCORPORATED AREAS	FLOODING SOURCE: BRYANT TRIBUTARY

LOCATION		FLOODWAY		1% ANNUAL CHANCE FLOOD WATER SURFACE ELEVATION (FEET NAVD88)			RFACE	
CROSS SECTION	DISTANCE ¹	WIDTH (FEET)	SECTION AREA (SQ. FEET)	MEAN VELOCITY (FEET/ SEC)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
A B	25,555 31,416	247 167	1,871 650	4.1 8.8	550.4 578.3	550.4 578.3	551.0 579.3	0.6 1.0

¹Feet above confluence with South Fork Saline River

TAB	FEDERAL EMERGENCY MANAGEMENT AGENCY	FLOODWAY DATA
Ē	SALINE COUNTY, ARKANSAS	
23	AND INCORPORATED AREAS	FLOODING SOURCE: CEDAR CREEK

LOCATION	FLOODWAY	1% ANNUAL CHANCE FLOOD WATER SURFACE ELEVATION (FEET NAVD88)			
I DISTANCE!	OTH SECTION MEAN AREA VELOCITY (SQ. FEET) (FEET/SEC)	REGULATORY WITHOUT FLOODWAY	WITH FLOODWAY INCREASE		
B 47,743 30	84 2,627 1.3 03 1,435 2.3 38 2,829 1.0	257.0 257.0 257.3 257.3 269.9 269.9	258.0 1.0 258.2 0.9 269.9 0.0		

¹Feet above Confluence of Pennington Bayou

TAI	FEDERAL EMERGENCY MANAGEMENT AGENCY	FLOODWAY DATA
	SALINE COUNTY, ARKANSAS	. 2005////
23	AND INCORPORATED AREAS	FLOODING SOURCE: CLEAR CREEK

LOCA	TION		FLOODWAY			1% ANNUAL CHANCE FLOOD WATER SURFACE ELEVATION (FEET NAVD88)			
CROSS SECTION	DISTANCE ¹	WIDTH (FEET)	SECTION AREA (SQ. FEET)	MEAN VELOCITY (FEET/ SEC)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE	
A B C D E F	15,576 20,064 27,456 30,096 31,680 36,590	1,138 657 403 150 145 51	8,213 3,371 3,805 918 604 149	1.3 1.9 1.4 3.7 4.3 4.0	320.1 327.6 351.4 353.6 357.6 392.7	320.1 327.6 351.4 353.6 357.6 392.7	320.9 328.2 352.3 354.4 357.9 393.5	0.8 0.9 0.8 0.3 0.8	

¹Feet above confluence with Fourche Creek

TA	FEDERAL EMERGENCY MANAGEMENT AGENCY	FLOODWAY DATA
	SALINE COUNTY, ARKANSAS	
23	AND INCORPORATED AREAS	FLOODING SOURCE: CROOKED CREEK

LOCAT	ION	FLOODWAY			1% ANNUAL CHANCE FLOOD WATER SURFACE ELEVATION (FEET NAVD88)			RFACE
CROSS SECTION	DISTANCE ¹	WIDTH (FEET)	SECTION AREA (SQ. FEET)	MEAN VELOCITY (FEET/ SEC)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
A B	158 2,270	55 64	182 177	4.2 3.1	373.4 397.2	373.4 397.2	374.3 398.2	0.9 1.0

¹Feet above confluence with Crooked Creek

AB	FEDERAL EMERGENCY MANAGEMENT AGENCY	FLOODWAY DATA
E SE	SALINE COUNTY, ARKANSAS	
23	AND INCORPORATED AREAS	FLOODING SOURCE: CROOKED CREEK TRIBUTARY

LOCATI	LOCATION		FLOODWAY			L CHANCE FLO	OOD WATER SU EET NAVD88)	RFACE
CROSS SECTION	DISTANCE ¹	WIDTH (FEET)	SECTION AREA (SQ. FEET)	MEAN VELOCITY (FEET/SEC)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
A B C D	2,346 4,324 7,876 12,164	442 579 575 639	3,070 4,041 4,383 3,010	3.0 2.2 1.4 2.0	258.5 259.9 264.8 267.7	258.5 259.9 264.8 267.7	259.0 260.6 265.3 268.7	0.5 0.7 0.5 1.0

¹Feet above Confluence of Clear Creek

TA	FEDERAL EMERGENCY MANAGEMENT AGENCY	FLOODWAY DATA
	SALINE COUNTY, ARKANSAS	12005W/(12)/(1/)
23	AND INCORPORATED AREAS	FLOODING SOURCE: DUCK CREEK

LOCATION		FLOODWAY		1% ANNUAL CHANCE FLOOD WATER SURFACE ELEVATION (FEET NAVD88)			RFACE	
CROSS SECTION	DISTANCE ¹	WIDTH (FEET)	SECTION AREA (SQ. FEET)	MEAN VELOCITY (FEET/ SEC)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
A ³ B ³ C ³ D ³ E ³ F G H	22.54 23.00 23.35 23.70 24.21 31.86 32.45 33.10	631 957 865 926 746/31 ² 254 200 103	2,968 5,257 5,044 5,162 4,693 1,753 1,052 415	4.1 2.3 2.4 2.3 2.6 2.5 2.5 6.3	320.8 325.9 332.0 336.2 342.5 489.1 506.4 531.9	320.8 325.9 332.0 336.2 342.5 489.1 506.4 531.9	321.6 326.8 333.0 337.1 343.4 489.1 507.0 532.1	0.8 0.9 1.0 0.9 0.9 0.0 0.6 0.2

¹Miles above confluence with Arkansas River

TAI	FEDERAL EMERGENCY MANAGEMENT AGENCY	FLOODWAY DATA
뭐	SALINE COUNTY, ARKANSAS	
23	AND INCORPORATED AREAS	FLOODING SOURCE: FOURCHE CREEK

²Total floodway width / width within jurisdiction

LOCAT	ION		FLOODWAY			L CHANCE FLO	OOD WATER SU ET NAVD88)	RFACE
CROSS SECTION	DISTANCE ¹	WIDTH (FEET)	SECTION AREA (SQ. FEET)	MEAN VELOCITY (FEET/SEC)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
A B	3,400 4,720	244 267	1,832 2,341	3.2 2.5	277.0 279.4	277.0 279.4	277.8 280.3	0.8 0.9

¹Feet above Confluence of Lorance Creek

ΤA	FEDERAL EMERGENCY MANAGEMENT AGENCY	FLOODWAY DATA
	SALINE COUNTY, ARKANSAS	. 2003
23	AND INCORPORATED AREAS	FLOODING SOURCE: HOPE BRANCH

CROSS SECTION         DISTANCE¹         WIDTH (FEET)         SECTION AREA (SQ. FEET)         MEAN VELOCITY (FEET/SEC)         REGULATORY         WITHOUT FLOODWAY         WITH FLOODWAY           A         324,427 B B 325,403 C 329,418 D 331,979 D 331,979 1,410 B B 333,713 C B B B B B B B B B B B B B B B B B B	
B       325,403       1,070       9,910       2.1       340.4       340.4       340.4       340.5         C       329,418       1,600       9,848       2.1       343.1       343.1       343.9         D       331,979       1,410       11,030       1.9       348.4       348.4       349.1         E       333,713       1,290       7,962       6.3       351.5       351.5       352.0         F       335,217       1,040       8,373       2.4       356.8       356.8       356.9         G       336,545       872       5,929       3.3       357.3       357.3       358.0         H       338,109       950       4,503       4.4       361.0       361.0       361.2         I       339,747       820       3,585       5.5       361.5       361.5       362.2         J       340,646       800       5,218       3.8       364.9       364.9       365.8         K       342,132       790       4,557       4.3       366.9       366.9       367.3	INCREASE
M     344,367     597     6,429     4.7     377.4     377.4     378.1       N     347,898     336     3,893     4.3     381.5     381.5     382.5       O     348,221     2,020     48,908     0.2     405.4     405.4     405.4       P     354,749     1,132     10,751     0.9     405.4     405.4     405.4       Q     355,709     985     7,488     1.3     405.4     405.4     405.4       R     359,382     642     2,660     2.6     409.8     409.8     410.1	0.0 0.1 0.8 0.7 0.5 0.1 0.7 0.2 0.7 0.9 0.4 0.7 0.7 1.0 0.0 0.0 0.0

¹Feet above confluence with Saline River

ΤA	FEDERAL EMERGENCY MANAGEMENT AGENCY	FLOODWAY DATA
	SALINE COUNTY, ARKANSAS	. 2003
23	AND INCORPORATED AREAS	FLOODING SOURCE: HURRICANE CREEK

LOCATION		FLOODWAY			1% ANNUAL CHANCE FLOOD WATER SURFACE ELEVATION (FEET NAVD88)			
CROSS SECTION	DISTANCE ¹	WIDTH (FEET)	SECTION AREA (SQ. FEET)	MEAN VELOCITY (FEET/SEC)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
A B C D E F G H	3,221 5,682 6,997 7,481 9,325 9,393 10,769 11,569	909 457 104 236 259 269 300 225	1,147 3,108 545 1,544 1,137 1,850 1,583 1,488	6.1 2.2 12.8 4.5 6.1 3.8 4.4 4.7	405.4 ² 405.4 ² 405.8 413.8 421.4 423.0 427.4 431.2	393.6 401.4 405.8 413.8 421.4 423.0 427.4 431.2	393.6 401.4 405.9 414.2 422.2 423.9 428.1 431.9	0.0 0.0 0.1 0.4 0.8 0.9 0.7 0.7

¹Feet above confluence with Hurricane Creek

²Elevation computed with consideration of backwater effects from Hurricane Creek

TΑ	FEDERAL EMERGENCY MANAGEMENT AGENCY	FLOODWAY DATA
	SALINE COUNTY, ARKANSAS	1.200211111.271111
23	AND INCORPORATED AREAS	FLOODING SOURCE: LITTLE HURRICANE CREEK

LOCATION		FLOODWAY			1% ANNUAL CHANCE FLOOD WATER SURFACE ELEVATION (FEET NAVD88)			
CROSS SECTION	DISTANCE ¹	WIDTH (FEET)	SECTION AREA (SQ. FEET)	MEAN VELOCITY (FEET/ SEC)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
A B ² C ² D E F G	11.34 12.38 13.32 15.58 16.00 17.49 18.22 19.24	635/390 ³ 1,045 440 534 1500/33 ³ 649 685 802	7,109 9,317 3,754 5,085 9,079 5,172 4,294 4,001	1.5 1.1 3.3 2.4 1.4 1.2 1.5 1.4	247.9 252.9 254.5 266.6 268.1 277.8 283.0 288.5	247.9 252.9 254.5 266.6 268.1 277.8 283.0 288.5	248.7 253.9 255.5 267.5 269.0 278.7 283.2 289.4	0.8 1.0 1.0 0.9 0.9 0.9 0.2 0.9

¹Miles above confluence with Arkansas River

7,T	FEDERAL EMERGENCY MANAGEMENT AGENCY	EL CODWAY DATA			
BL	SALINE COUNTY, ARKANSAS	FLOODWAY DATA			
П	SALINE COUNTY, ANNAMOAS				
23	AND INCORPORATED AREAS	FLOODING SOURCE: LORANCE AND DRY CREEKS			

²Cross Section located outside of unincorporated area of Saline County ³Total floodway width / width within jurisdiction

LOCAT	LOCATION		FLOODWAY			1% ANNUAL CHANCE FLOOD WATER SURFACE ELEVATION (FEET NAVD88)			
CROSS SECTION	DISTANCE ¹	WIDTH (FEET)	SECTION AREA (SQ. FEET)	MEAN VELOCITY (FEET/SEC)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE	
A B C D E F G	13786 16,585 20,026 24,300 28,246 31,850 34,625	327 406 381 657 147 194 232	1,407 2,537 1,969 2,611 719 748 873	1.5 1.1 1.2 0.8 3.1 3.0 1.7	239.7 242.7 244.9 251.2 258.1 267.0 274.6	239.7 242.7 244.9 251.2 258.1 267.0 274.6	240.6 242.9 245.4 251.3 258.9 267.0 275.3	0.9 0.2 0.5 0.1 0.8 0.0 0.7	

¹Feet above Confluence of Lorance Creek

Ā	FEDERAL EMERGENCY MANAGEMENT AGENCY	FLOODWAY DATA
	SALINE COUNTY, ARKANSAS	1200311111
23	AND INCORPORATED AREAS	FLOODING SOURCE: MAPLE CREEK

LOCATION		FLOODWAY			1% ANNUAL CHANCE FLOOD WATER SURFACE ELEVATION (FEET NAVD88)			
CROSS SECTION	DISTANCE ¹	WIDTH (FEET)	SECTION AREA (SQ. FEET)	MEAN VELOCITY (FEET/SEC)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
A B	2,219 3,453	70 287	299 894	3.4 0.9	248.7 250.3	248.7 250.3	249.6 251.3	0.9 1.0

¹Feet above Confluence of Maple Creek

ΤA	FEDERAL EMERGENCY MANAGEMENT AGENCY	FLOODWAY DATA				
문	SALINE COUNTY, ARKANSAS	1 EGODINAT DATA				
23	AND INCORPORATED AREAS	FLOODING SOURCE: MAPLE CREEK TRIBUTARY				

LOCATION		FLOODWAY			1% ANNUAL CHANCE FLOOD WATER SURFACE ELEVATION (FEET NAVD88)			
CROSS SECTION	DISTANCE ¹	WIDTH (FEET)	SECTION AREA (SQ. FEET)	MEAN VELOCITY (FEET/SEC)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
A B	2,750 5,790	208 164	919 806	1.3	290.1 301.3	290.1 301.3	291.0 302.3	0.9

¹Feet above Confluence of Hope Branch

ΤA	FEDERAL EMERGENCY MANAGEMENT AGENCY	FLOODWAY DATA
	SALINE COUNTY, ARKANSAS	
23	AND INCORPORATED AREAS	FLOODING SOURCE: MCCRIGHT BRANCH

LOCATION		FLOODWAY			1% ANNUAL CHANCE FLOOD WATER SURFACE ELEVATION (FEET NAVD88)			
CROSS SECTION	DISTANCE ¹	WIDTH (FEET)	SECTION AREA (SQ. FEET)	MEAN VELOCITY (FEET/SEC)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
A B C D E F G H - J K L M	620 2,320 2,420 4,030 4,730 6,820 7,050 7,370 7,530 7,730 8,730 8,880 9,980	100 149 129 88 103 81 73 80 58 75 55 32 190	546 451 429 275 399 213 284 300 366 402 322 156 706	7.3 6.7 7.0 10.9 7.5 12.1 9.1 8.6 7.0 6.4 6.3 13.0 2.9	291.4 297.5 300.0 323.2 329.2 350.5 353.6 358.4 362.5 363.6 372.6 373.9 386.4	281.6 ² 297.5 300.0 323.2 329.2 350.5 353.6 358.4 362.5 363.6 372.6 373.9 386.4	282.3 297.5 300.0 323.2 329.4 350.5 354.3 358.5 362.5 363.6 372.6 373.9 386.4	0.7 0.0 0.0 0.0 0.2 0.0 0.7 0.1 0.0 0.0 0.0 0.0

¹Feet above Confluence of Saline River

TAI	FEDERAL EMERGENCY MANAGEMENT AGENCY	FLOODWAY DATA
BLE	SALINE COUNTY, ARKANSAS	. 2002
23	AND INCORPORATED AREAS	FLOODING SOURCE: MCNEIL CREEK

²Computed without backwater

LOCAT	TION	FLOODWAY			1% ANNUAL CHANCE FLOOD WATER SURFACE ELEVATION (FEET NAVD88)			RFACE
CROSS SECTION	DISTANCE ¹	WIDTH (FEET)	SECTION AREA (SQ. FEET)	MEAN VELOCITY (FEET/ SEC)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
A B C D E F G H	16.21 17.37 18.43 19.53 20.66 21.40 22.36 23.81	885 1,200 939 820 652 628 649 1,085	6,632 12,172 6,994 7,817 5,585 5,528 7,509 10,316	4.3 2.3 4.1 3.7 5.1 5.2 3.8 2.8	470.1 481.5 492.0 505.5 515.7 525.3 536.4 547.4	470.1 481.5 492.0 505.5 515.7 525.3 536.4 547.4	470.8 482.3 493.0 505.7 516.2 526.2 537.3 548.2	0.7 0.8 1.0 0.2 0.5 0.9 0.9

¹Miles above confluence with Alum Fork Saline River

TAI	FEDERAL EMERGENCY MANAGEMENT AGENCY	FLOODWAY DATA
1 BLE	SALINE COUNTY, ARKANSAS	
23	AND INCORPORATED AREAS	FLOODING SOURCE: MIDDLE FORK SALINE RIVER

LOCA	ATION	FLOODWAY		1% ANNUAL CHANCE FLOOD WATER SURFACE ELEVATION (FEET NAVD88)			RFACE	
CROSS SECTION	DISTANCE ¹	WIDTH (FEET)	SECTION AREA (SQ. FEET)	MEAN VELOCITY (FEET/ SEC)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
А	3,062	231	1,271	4.0	545.4	545.4	546.4	1.0

¹Feet above confluence with Middle Fork Saline River

TABI	FEDERAL EMERGENCY MANAGEMENT AGENCY	FLOODWAY DATA			
ш	SALINE COUNTY, ARKANSAS				
23	AND INCORPORATED AREAS	FLOODING SOURCE: MILL CREEK			

LOCAT	LOCATION		FLOODWAY		1% ANNUAL CHANCE FLOOD WATER SURFACE ELEVATION (FEET NAVD88)			RFACE
CROSS SECTION	DISTANCE ¹	WIDTH (FEET)	SECTION AREA (SQ. FEET)	MEAN VELOCITY (FEET/ SEC)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
A B	0.4 1.3	1,240 1,097	17,377 12,685	1.9 2.6	299.5 301.7	299.5 301.7	300.5 302.6	1.0 0.9

¹Feet above confluence with Saline River and Alum Fork Saline River

TAI	FEDERAL EMERGENCY MANAGEMENT AGENCY	FLOODWAY DATA			
3FE	SALINE COUNTY, ARKANSAS				
23	AND INCORPORATED AREAS	FLOODING SOURCE: NORTH FORK SALINE RIVER			

LOC	LOCATION		FLOODWAY			L CHANCE FLO	OOD WATER SU EET NAVD88)	RFACE
CROSS SECTION	DISTANCE ¹	WIDTH (FEET)	SECTION AREA (SQ. FEET)	MEAN VELOCITY (FEET/SEC)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
A B C D E	26,664 29,251 30,571 33,370 37,910	550/223 ² 506 478 732 470	3,613 2,935 2,232 4,670 2,393	1.6 1.5 1.8 1.5 1.5	311.9 313.7 315.8 318.9 329.9	311.9 313.7 315.8 318.9 329.9	312.9 314.7 316.8 319.8 330.9	1.0 1.0 1.0 0.9 1.0

¹Feet above Confluence of Fourche Creek

²Width/width within county limits

TA	FEDERAL EMERGENCY MANAGEMENT AGENCY	FLOODWAY DATA
	SALINE COUNTY, ARKANSAS	. 2002
23	AND INCORPORATED AREAS	FLOODING SOURCE: OTTER CREEK

LOCAT	LOCATION		FLOODWAY			L CHANCE FLO	OOD WATER SU EET NAVD88)	RFACE
CROSS SECTION	DISTANCE ¹	WIDTH (FEET)	SECTION AREA (SQ. FEET)	MEAN VELOCITY (FEET/SEC)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
A B	370 3,010	132 350	357 1,408	5.5 1.4	322.1 332.1	322.1 332.1	323.1 333.1	1.0 1.0

¹Feet above Confluence of Otter Creek

TA	FEDERAL EMERGENCY MANAGEMENT AGENCY	FLOODWAY DATA
BLE	SALINE COUNTY, ARKANSAS	120001111111111111111111111111111111111
23	AND INCORPORATED AREAS	FLOODING SOURCE: OTTER CREEK TRIBUTARY

LOCAT	LOCATION		FLOODWAY			L CHANCE FLO	OOD WATER SU EET NAVD88)	RFACE
CROSS SECTION	DISTANCE ¹	WIDTH (FEET)	SECTION AREA (SQ. FEET)	MEAN VELOCITY (FEET/SEC)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
A B C D E F G	3,220 4,960 8,130 10,890 14,190 15,880 20,000	425 370 373 284 230 230 248	2,242 2,302 2,113 1,108 741 1,083 1,163	3.0 3.1 3.4 6.5 6.3 4.1 3.4	323.7 329.6 339.2 352.9 367.4 380.6 405.2	323.7 329.6 339.2 352.9 367.4 380.6 405.2	324.6 329.6 340.1 353.0 367.5 381.5 406.2	0.9 0.0 0.9 0.1 0.1 0.9 1.0

¹Feet above Pulaski County

TAB	FEDERAL EMERGENCY MANAGEMENT AGENCY	FLOODWAY DATA			
E E	SALINE COUNTY, ARKANSAS				
23	AND INCORPORATED AREAS	FLOODING SOURCE: OWEN CREEK			

LOCAT	TON		FLOODWAY		1% ANNUAL CHANCE FLOOD WATER SURFACE ELEVATION (FEET NAVD88)			RFACE
CROSS SECTION	DISTANCE ¹	WIDTH (FEET)	SECTION AREA (SQ. FEET)	MEAN VELOCITY (FEET/ SEC)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
A B C D E F G H –	183.89 189.90 195.00 195.95 196.58 197.24 197.92 198.97 200.51	4000/3563 ² 9,796 5,973 5,185 4,176 3,115 1,213 2,081 3,130	48,451 79,519 50,406 21,505 59,399 25,393 21,061 33,630 30,746	2.2 1.3 2.1 4.9 1.8 4.1 5.0 3.1 3.4	251.8 264.2 274.6 282.7 284.6 286.1 287.8 292.4 295.9	251.8 264.2 274.6 282.7 284.6 286.1 287.8 292.4 295.9	252.6 265.1 275.6 283.2 285.1 286.8 288.5 293.1 296.8	0.8 0.9 1.0 0.5 0.5 0.7 0.7 0.7 0.9

¹Miles above confluence with Ouachita River

TAI	FEDERAL EMERGENCY MANAGEMENT AGENCY	FLOODWAY DATA
1 BLE	SALINE COUNTY, ARKANSAS	
23	AND INCORPORATED AREAS	FLOODING SOURCE: SALINE RIVER

²Total floodway width/ width within jurisdiction

LOCATI	ON	FLOODWAY		1% ANNUAL CHANCE FLOOD WATER SURFACE ELEVATION (FEET NAVD88)			RFACE	
CROSS SECTION	DISTANCE ¹	WIDTH (FEET)	SECTION AREA (SQ. FEET)	MEAN VELOCITY (FEET/ SEC)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
A B C D E F G H – J K L M N O P Q R	2,800 3,225 3,650 4,050 4,500 4,925 5,875 6,825 7,250 8,250 8,550 9,550 10,225 10,725 11,345 11,820 12,440 13,440	333 327 319 405 261 220 205 197 159 299 206 120 153 122 121 127 153 150	1,595 1,490 1,526 1,773 450 1,097 854 1,156 344 373 642 448 431 340 927 353 370 548	2.4 3.2 2.5 2.1 4.8 4.4 4.7 3.7 4.3 6.0 5.9 7.7 3.4 7.5 3.2 4.7 4.5 5.0	293.0 293.2 293.4 293.7 293.7 293.7 297.2 304.4 306.5 312.9 316.2 324.2 331.7 334.3 340.1 343.0 349.6 360.0	281.3 ² 282.9 ² 284.4 ² 285.9 ² 287.9 ² 297.2 304.4 306.5 312.9 316.2 324.2 331.7 334.3 340.1 343.0 349.6 360.0	282.3 283.8 285.2 286.9 287.9 293.3 297.7 305.2 306.5 312.9 316.9 324.7 332.4 334.3 341.1 343.0 350.0 360.6	1.0 0.9 0.8 1.0 0.0 0.6 0.5 0.8 0.0 0.0 0.7 0.5 0.7 0.0 1.0 0.0 0.4

TABI	FEDERAL EMERGENCY MANAGEMENT AGENCY	FLOODWAY DATA
Fi	SALINE COUNTY, ARKANSAS	
23	AND INCORPORATED AREAS	FLOODING SOURCE: SALT CREEK

¹Feet above confluence with Saline River ²Elevation computed without consideration of backwater effects from Saline River

LOCATI	TION FLOODWAY 1% ANNUAL CHANCE FLOOD WATE ELEVATION (FEET NAVD8			FLOODWAY			RFACE	
CROSS SECTION	DISTANCE ¹	WIDTH (FEET)	SECTION AREA (SQ. FEET)	MEAN VELOCITY (FEET/ SEC)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
A B C	475 2,320 3,854	248 77 114	806 331 278	1.9 4.7 7.5	313.2 320.0 329.7	312.1 ² 320.0 329.7	313.1 320.9 330.3	1.0 0.9 0.6

¹Feet above confluence with Otter Creek

²Elevation computed without consideration of backwater effects from Fourche Creek

TAI	FEDERAL EMERGENCY MANAGEMENT AGENCY	FLOODWAY DATA
BLE	SALINE COUNTY, ARKANSAS	
23	AND INCORPORATED AREAS	FLOODING SOURCE: SHANNON HILLS TRIBUTARY

LOCAT	LOCATION FLOODWAY			1% ANNUAL CHANCE FLOOD WATER SURFACE ELEVATION (FEET NAVD88)			RFACE	
CROSS SECTION	DISTANCE ¹	WIDTH ² (FEET)	SECTION AREA (SQ. FEET)	MEAN VELOCITY (FEET/SEC)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
ABCDEFGH-JKLMNOPQR	50,104 51,430 51,955 52,735 53,696 54,954 55,599 56,470 57,120 57,794 59,644 60,722 61,585 62,383 63,354 65,012 66,503 67,731	82 193 114 142 148 247 138 196 54 218 205 378 313 293 211 60 204 116	665 877 758 638 746 1,090 627 1,153 336 846 632 991 782 921 588 361 956 481	4.2 3.2 3.6 4.2 3.6 2.5 4.3 2.3 7.0 2.8 3.7 2.4 3.0 2.5 4.0 6.5 2.5 4.9	279.9 282.8 285.6 287.2 289.5 294.0 296.4 300.4 300.4 303.5 307.0 310.2 312.8 315.9 318.8 326.7 334.8	279.9 282.8 285.6 287.2 289.5 294.0 296.4 300.4 300.4 303.5 307.0 310.2 312.8 315.9 318.8 326.7 334.8	280.8 283.7 285.9 287.9 290.5 295.0 297.4 301.0 301.3 304.1 307.9 311.1 313.8 316.7 319.8 327.3 335.8 341.4	0.9 0.9 0.3 0.7 1.0 1.0 0.6 0.9 0.6 0.9 0.9 1.0 0.8 1.0 0.6 1.0
S	68,619	103	504	4.6	346.8	346.8	347.6	0.8

¹Feet above confluence with Saline River

ΤA	FEDERAL EMERGENCY MANAGEMENT AGENCY	FLOODWAY DATA
	SALINE COUNTY, ARKANSAS	
23	AND INCORPORATED AREAS	FLOODING SOURCE: TRACE CREEK

²Width measured from left encroachment to right encroachment with small island considerations

LOCAT	LOCATION  FLOODWAY  1% ANNUAL CHANCE FLOOD WATER SURFACE ELEVATION (FEET NAVD88)			FLOODWAY			RFACE	
CROSS SECTION	DISTANCE ¹	WIDTH (FEET)	SECTION AREA (SQ. FEET)	MEAN VELOCITY (FEET/ SEC)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
A B	0.18 0.38	275 397	2,261 2,831	0.5 0.4	348.0 348.0	348.0 348.0	348.8 348.9	0.8 0.9

¹Miles above confluence with Crooked Creek

TAI	FEDERAL EMERGENCY MANAGEMENT AGENCY	FLOODWAY DATA
BLE	SALINE COUNTY, ARKANSAS	
23	AND INCORPORATED AREAS	FLOODING SOURCE: TRAILER PARK DITCH

LOCAT	OCATION  FLOODWAY  1% ANNUAL CHANCE FLOOD WATER SURF ELEVATION (FEET NAVD88)			RFACE				
CROSS SECTION	DISTANCE ¹	WIDTH (FEET)	SECTION AREA (SQ. FEET)	MEAN VELOCITY (FEET/ SEC)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
A B C	1,850 2,140 5,330	392 390 511	(SQ. FEET) 1,369 1,100 924	1.8 2.2 2.4	337.9 338.6 355.9	337.9 338.6 355.9	338.9 339.2 355.9	1.0 0.6 0.0

¹Feet above confluence with Willow Depot Creek

TAI	FEDERAL EMERGENCY MANAGEMENT AGENCY	FLOODWAY DATA
1 BLE	SALINE COUNTY, ARKANSAS	
23	AND INCORPORATED AREAS	FLOODING SOURCE: UPPER DEPOT CREEK

LOCAT	LOCATION		FLOODWAY		1% ANNUAL CHANCE FLOOD WATER SURFACE ELEVATION (FEET NAVD88)			
CROSS SECTION	DISTANCE ¹	WIDTH (FEET)	SECTION AREA (SQ. FEET)	MEAN VELOCITY (FEET/ SEC)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
A	1,525	1,619	7,424	1.2	281.5	280.5 ²	281.4	0.9
B	2,475	1,254	6,777	1.3	281.5	280.6 ²	281.6	1.0
C	2,885	1,451	1,539	1.4	281.5	280.5 ²	280.9	0.4
	3,525	624	3,954	2.1	281.5	281.0 ²	282.0	1.0
E	4,025	428	2,908	2.9	281.5	281.3 ²	282.2	0.9
F	4,525	197	1,107	4.8	281.5	281.3 ²	282.1	0.8
G	5,025	203	914	5.2	283.9	283.9	284.4	0.5
H	6,025	210	836	4.9	287.9	287.9	288.4	0.5
	6,550	241	1,760	3.0	290.4	290.4	291.4	1.0
J	7,075	239	1,588	3.2	291.8	291.8	292.5	0.7
K	8,025	295	1,118	5.5	294.6	294.6	295.0	0.4
L	8,615	305	915	5.3	298.0	298.0	298.2	0.2
M	8,975	410	2,119	3.0	300.6	300.6	301.4	0.8
N	9,597	578	2,883	2.1	302.2	302.2	303.1	0.9
O P	10,537 10,885	406 383	1,921 1,262	4.0 4.0	304.1 305.2	304.1 305.2	305.1 305.1 305.3	1.0 0.1
Q	11,335	405	1,320	3.9	306.5	306.5	307.5	1.0
R	11,575	400	799	2.7	306.7	306.7	306.7	0.0
S	12,125	385	1,978	3.9	309.9	309.9	310.8	0.9
T	12,535	403	2,352	3.1	312.4	312.4	313.4	1.0
U	13,025	487	3,727	2.2	313.6	313.6	314.6	1.0
V	13,650	617	1,184	2.8	314.2	314.2	314.9	0.7

¹Feet above confluence with Saline River

²Elevation computed without consideration of backwater effects from Saline River

<b>↓</b>	FEDERAL EMERGENCY MANAGEMENT AGENCY	FLOODWAY DATA			
É	SALINE COUNTY, ARKANSAS				
E 23	AND INCORPORATED AREAS	FLOODING SOURCE: WILLOW DEPOT CREEK			
~					

LOCAT	TON		FLOODWAY		1% ANNUAL CHANCE FLOOD WATER SURFACE ELEVATION (FEET NAVD88)			
CROSS SECTION	DISTANCE ¹	WIDTH (FEET)	SECTION AREA (SQ. FEET)	MEAN VELOCITY (FEET/ SEC)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
W X Y Z AA AB AC AD AE AF AG AH AI AJ AK AL	14,200 14,740 15,575 15,775 16,075 16,525 16,985 17,360 17,650 17,925 18,125 18,300 18,400 18,850 19,250 19,500	575 414 398 395 294 298 493 339 341 338 286 80 68 444 465 340	2,990 1,573 1,729 1,482 1,967 1,220 2,690 2,241 1,876 2,271 1,800 461 401 3,123 2,842 1,799	3.2 3.8 6.1 3.2 4.1 6.1 4.0 4.4 4.6 3.6 3.7 2.7 3.1 1.5 1.8 2.5	316.1 317.9 320.1 321.8 322.5 324.0 326.1 327.2 328.6 329.8 330.8 331.2 332.0 336.0 336.3 336.9	316.1 317.9 320.1 321.8 322.5 324.0 326.1 327.2 328.6 329.8 330.8 331.2 332.2 336.0 336.3 336.9	317.1 318.4 320.7 322.6 323.5 324.4 327.0 328.2 329.4 330.7 331.8 331.2 332.2 337.0 337.3 337.9	1.0 0.5 0.6 0.8 1.0 0.4 0.9 1.0 0.8 0.9 1.0 0.0 1.0 1.0
AM AN	20,250 20,800	201 200	658 881	4.4 3.4	339.8 342.8	339.8 342.8	340.3 343.6	0.5 0.8
AO	21,050	206	843	4.0	343.9	343.9	344.7	8.0
AP AQ	21,400 21,625	195 193	848 600	4.4 3.3	346.0 347.8	346.0 347.8	346.6 348.3	0.6 0.5
AR	22,075	208	906	4.2	349.8	349.8	350.6	0.8

¹Feet above confluence with Saline River

TAB	FEDERAL EMERGENCY MANAGEMENT AGENCY	FLOODWAY DATA		
E	SALINE COUNTY, ARKANSAS			
23	AND INCORPORATED AREAS	FLOODING SOURCE: WILLOW DEPOT CREEK		

LOCAT	TON	FLOODWAY		1% ANNUAL CHANCE FLOOD WATER SURFACE ELEVATION (FEET NAVD88)			RFACE	
CROSS SECTION	DISTANCE ¹	WIDTH (FEET)	SECTION AREA (SQ. FEET)	MEAN VELOCITY (FEET/ SEC)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
AS AT AU AV AW AX AY AZ	22,265 22,865 23,365 23,815 24,040 24,465 24,715 24,865	315 250 259 206 205 194 102 59	1,709 984 1,014 786 390 1,080 435 293	3.0 4.5 5.2 5.3 6.1 4.3 5.4 4.2	350.8 354.5 357.3 360.8 362.7 368.6 370.8 377.3	350.8 354.5 357.3 360.8 362.7 368.6 370.8 377.3	351.8 355.2 358.0 361.5 363.0 369.4 371.6 377.3	1.0 0.7 0.7 0.7 0.3 0.8 0.8 0.0

¹Feet above confluence with Saline River

TAI	FEDERAL EMERGENCY MANAGEMENT AGENCY	FLOODWAY DATA
BLE	SALINE COUNTY, ARKANSAS	
23	AND INCORPORATED AREAS	FLOODING SOURCE: WILLOW DEPOT CREEK

Non-encroachment areas may be delineated where it is not possible to delineate floodways because specific channel profiles with bridge and culvert geometry were not developed. Any non-encroachment determinations for this Flood Risk Project have been tabulated for selected cross sections and are shown in Table 24. The non-encroachment width indicates the measured distance left and right (looking downstream) from the mapped center of the stream to the non-encroachment boundary based on a surcharge of 1.0 foot or less.

#### Table 24: Flood Hazard and Non-Encroachment Data for Selected Streams

[Not applicable to this Flood Risk Project]

## 6.4 Coastal Flood Hazard Mapping

This section is not applicable to this Flood Risk Project.

### **Table 25: Summary of Coastal Transect Mapping Considerations**

[Not applicable to this Flood Risk Project]

#### 6.5 FIRM Revisions

This FIS Report and the FIRM are based on the most up-to-date information available to FEMA at the time of its publication; however, flood hazard conditions change over time. Communities or private parties may request flood map revisions at any time. Certain types of requests require submission of supporting data. FEMA may also initiate a revision. Revisions may take several forms, including Letters of Map Amendment (LOMAs), Letters of Map Revision Based on Fill (LOMR-Fs), Letters of Map Revision (LOMRs) (referred to collectively as Letters of Map Change (LOMCs)), Physical Map Revisions (PMRs), and FEMA-contracted restudies. These types of revisions are further described below. Some of these types of revisions do not result in the republishing of the FIS Report. To assure that any user is aware of all revisions, it is advisable to contact the community repository of flood-hazard data (shown in Table 30, "Map Repositories").

#### 6.5.1 Letters of Map Amendment

A LOMA is an official revision by letter to an effective NFIP map. A LOMA results from an administrative process that involves the review of scientific or technical data submitted by the owner or lessee of property who believes the property has incorrectly been included in a designated SFHA. A LOMA amends the currently effective FEMA map and establishes that a specific property is not located in a SFHA.

To obtain an application for a LOMA, visit <a href="www.fema.gov/letter-map-amendment-loma">www.fema.gov/letter-map-amendment-loma</a> and download the form "MT-1 Application Forms and Instructions for Conditional and Final Letters of Map Amendment and Letters of Map Revision Based on Fill". Visit the "Flood Map-Related Fees" section to determine the cost, if any, of applying for a LOMA.

FEMA offers a tutorial on how to apply for a LOMA. The LOMA Tutorial Series can be accessed at <a href="https://www.fema.gov/online-tutorials">www.fema.gov/online-tutorials</a>.

For more information about how to apply for a LOMA, call the FEMA Map Information eXchange; toll free, at 1-877-FEMA MAP (1-877-336-2627).

#### 6.5.2 Letters of Map Revision Based on Fill

A LOMR-F is an official revision by letter to an effective NFIP map. A LOMR-F states FEMA's determination concerning whether a structure or parcel has been elevated on fill above the base flood elevation and is, therefore, excluded from the SFHA.

Information about obtaining an application for a LOMR-F can be obtained in the same manner as that for a LOMA, by visiting <a href="www.fema.gov/letter-map-amendment-loma">www.fema.gov/letter-map-amendment-loma</a> for the "MT-1 Application Forms and Instructions for Conditional and Final Letters of Map Amendment and Letters of Map Revision Based on Fill" or by calling the FEMA Map Information eXchange, toll free, at 1-877-FEMA MAP (1-877-336-2627). Fees for applying for a LOMR-F, if any, are listed in the "Flood Map-Related Fees" section.

A tutorial for LOMR-F is available at www.fema.gov/online-tutorials.

## 6.5.3 Letters of Map Revision

A LOMR is an official revision to the currently effective FEMA map. It is used to change flood zones, floodplain and floodway delineations, flood elevations and planimetric features. All requests for LOMRs should be made to FEMA through the chief executive officer of the community, since it is the community that must adopt any changes and revisions to the map. If the request for a LOMR is not submitted through the chief executive officer of the community, evidence must be submitted that the community has been notified of the request.

To obtain an application for a LOMR, visit <a href="www.fema.gov/media-library/assets/documents/1343">www.fema.gov/media-library/assets/documents/1343</a> and download the form "MT-2 Application Forms and Instructions for Conditional Letters of Map Revision and Letters of Map Revision". Visit the "Flood Map-Related Fees" section to determine the cost of applying for a LOMR. For more information about how to apply for a LOMR, call the FEMA Map Information eXchange; toll free, at 1-877-FEMA MAP (1-877-336-2627) to speak to a Map Specialist.

Previously issued mappable LOMCs (including LOMRs) that have been incorporated into the Saline County FIRM are listed in Table 26. Please note that this table only includes LOMCs that have been issued on the FIRM panels updated by this map revision. For all other areas within this county, users should be aware that revisions to the FIS Report made by prior LOMRs may not be reflected herein and users will need to continue to use the previously issued LOMRs to obtain the most current data.

**Table 26: Incorporated Letters of Map Change** 

Case Number	Effective Date	Flooding Source	FIRM Panel(s)
13-06-1581P	03/17/2014	Cedar Creek	05125CO150D

#### 6.5.4 Physical Map Revisions

A Physical Map Revisions (PMR) is an official republication of a community's NFIP map

to effect changes to base flood elevations, floodplain boundary delineations, regulatory floodways and planimetric features. These changes typically occur as a result of structural works or improvements, annexations resulting in additional flood hazard areas or correction to base flood elevations or SFHAs.

The community's chief executive officer must submit scientific and technical data to FEMA to support the request for a PMR. The data will be analyzed and the map will be revised if warranted. The community is provided with copies of the revised information and is afforded a review period. When the base flood elevations are changed, a 90-day appeal period is provided. A 6-month adoption period for formal approval of the revised map(s) is also provided.

For more information about the PMR process, please visit <u>www.fema.gov</u> and visit the "Flood Map Revision Processes" section.

#### 6.5.5 Contracted Restudies

The NFIP provides for a periodic review and restudy of flood hazards within a given community. FEMA accomplishes this through a national watershed-based mapping needs assessment strategy, known as the Coordinated Needs Management Strategy (CNMS). The CNMS is used by FEMA to assign priorities and allocate funding for new flood hazard analyses used to update the FIS Report and FIRM. The goal of CNMS is to define the validity of the engineering study data within a mapped inventory. The CNMS is used to track the assessment process, document engineering gaps and their resolution, and aid in prioritization for using flood risk as a key factor for areas identified for flood map updates. Visit <a href="www.fema.gov">www.fema.gov</a> to learn more about the CNMS or contact the FEMA Regional Office listed in Section 8 of this FIS Report.

#### 6.5.6 Community Map History

The current FIRM presents flooding information for the entire geographic area of Saline County. Previously, separate FIRMs, Flood Hazard Boundary Maps (FHBMs) and/or Flood Boundary and Floodway Maps (FBFMs) may have been prepared for the incorporated communities and the unincorporated areas in the county that had identified SFHAs. Current and historical data relating to the maps prepared for the project area are presented in Table 27, "Community Map History." A description of each of the column headings and the source of the date is also listed below.

- Community Name includes communities falling within the geographic area shown
  on the FIRM, including those that fall on the boundary line, nonparticipating
  communities, and communities with maps that have been rescinded.
  Communities with No Special Flood Hazards are indicated by a footnote. If all
  maps (FHBM, FBFM, and FIRM) were rescinded for a community, it is not listed
  in this table unless SFHAs have been identified in this community.
- Initial Identification Date (First NFIP Map Published) is the date of the first NFIP map that identified flood hazards in the community. If the FHBM has been converted to a FIRM, the initial FHBM date is shown. If the community has never been mapped, the upcoming effective date or "pending" (for Preliminary FIS Reports) is shown. If the community is listed in Table 27 but not identified on the map, the community is treated as if it were unmapped.

- Initial FHBM Effective Date is the effective date of the first FHBM. This date may be the same date as the Initial NFIP Map Date.
- FHBM Revision Date(s) is the date(s) that the FHBM was revised, if applicable.
- Initial FIRM Effective Date is the date of the first effective FIRM for the community.
- FIRM Revision Date(s) is the date(s) the FIRM was revised, if applicable. This is the revised date that is shown on the FIRM panel, if applicable. As countywide studies are completed or revised, each community listed should have its FIRM dates updated accordingly to reflect the date of the countywide study. Once the FIRMs exist in countywide format, as PMRs of FIRM panels within the county are completed, the FIRM Revision Dates in the table for each community affected by the PMR are updated with the date of the PMR, even if the PMR did not revise all the panels within that community.

The initial effective date for the Saline County FIRMs in countywide format was 06/19/2012.

**Table 27: Community Map History** 

Community Name	Initial Identification Date	Initial FHBM Effective Date	FHBM Revision Date(s)	Initial FIRM Effective Date	FIRM Revision Date(s)
Alexander, City of	04/18/1975	04/18/1975	NONE	01/20/1982	06/05/2020 06/19/2012
Bauxite, Town of	06/19/2012	NONE	NONE	06/19/2012	06/05/2020
Benton, City of	11/16/1973	11/16/1973	10/24/1975	12/15/1981	06/05/2020 06/19/2012
Bryant, City of	06/27/1975	06/27/1975	NONE	06/28/1977	06/05/2020 06/19/2012 01/19/1996 08/19/1991
Haskell, City of	06/27/1975	06/27/1975	NONE	08/19/1987	06/05/2020 06/19/2012
Saline County Unincorporated Areas	08/09/1977	08/09/1977	NONE	11/17/1982	06/05/2020 06/19/2012 04/02/2003 01/19/1996
Shannon Hills, City of	05/17/1982	NONE	NONE	05/17/1982	06/05/2020 06/19/2012 08/15/1989
Traskwood, City of	04/18/1975	04/18/1975	NONE	10/12/1982	06/05/2020 06/19/2012

# **SECTION 7.0 – CONTRACTED STUDIES AND COMMUNITY COORDINATION**

## 7.1 Contracted Studies

Table 28 provides a summary of the contracted studies, by flooding source, that are included in this FIS Report.

Table 28: Summary of Contracted Studies Included in this FIS Report

Flooding Source	FIS Report Dated	Contractor	Number	Work Completed Date	Affected Communities
Alum Fork Saline River	1/19/1996	USACE-SWL	H-18-78	January 1981	Saline County, Unincorporated Areas
Boswell Creek	06/06/2020	Arkansas Natural Resources Commission	EMT-2013- CA-0012	November 1, 2014	City of Bryant
Bryant Tributary	1/19/1996	USACE-SWL	H-18-78	January 1996	City of Bryant
Cedar Creek	1/19/1996	USACE-SWL	H-18-78	January 1981	Saline County, Unincorporated Areas
Clear Creek	04/02/2003	USACE-SWL	H-18-78	April 2000	Saline County, Unincorporated Areas
Crooked Creek	1/19/1996	USACE-SWL	H-18-78	January 1996	City of Bryant City of Alexander
Crooked Creek Tributary	1/19/1996	USACE-SWL	H-18-78	January 1996	City of Bryant
Duck Creek	04/02/2003	USACE-SWL	H-18-78	April 2000	Saline County, Unincorporated Areas
Fourche Creek	1/19/1996	USACE-SWL	H-18-78	January 1981	Saline County, Unincorporated Areas
Hope Branch	04/02/2003	USACE-SWL	H-18-78	April 2000	Saline County, Unincorporated Areas
Hurricane Creek	06/06/2020	Arkansas Natural Resources Commission	EMT-2013- CA-0012	November 1, 2014	City of Benton

Table 28: Summary of Contracted Studies Included in this FIS Report (Continued)

Flooding Source	FIS Report Dated	Contractor	Number	Work Completed Date	Affected Communities
Hurricane Creek Tributary 1	06/06/2020	Arkansas Natural Resources Commission	EMT-2013- CA-0012	November 1, 2014	City of Benton Ctiy of Bryant Saline County, Unincorporated Areas
Hurricane Creek Tributary 1A	06/06/2020	Arkansas Natural Resources Commission	EMT-2013- CA-0012	November 1, 2014	City of Benton
Little Hurricane Creek	06/06/2020	Arkansas Natural Resources Commission	EMT-2013- CA-0012	November 1, 2014	City of Benton Ctiy of Bryant Saline County, Unincorporated Areas
Lorance and Dry Creeks	1/19/1996	USACE-SWL	H-18-78	January 1981	Saline County, Unincorporated Areas
Maple Creek	04/02/2003	USACE-SWL	H-18-78	April 2000	Saline County, Unincorporated Areas
Maple Creek Tributary	04/02/2003	USACE-SWL	H-18-78	April 2000	Saline County, Unincorporated Areas
McCright Branch	04/02/2003	USACE-SWL	H-18-78	April 2000	Saline County, Unincorporated Areas
McNeil Creek	06/15/1981	Garver & Garver, Inc.	H-4746	March 1980	City of Benton
Middle Fork Saline River	1/19/1996	USACE-SWL	H-18-78	January 1981	Saline County, Unincorporated Areas
Mill Creek	1/19/1996	USACE-SWL	H-18-78	January 1981	Saline County, Unincorporated Areas
North Fork Saline River	1/19/1996	USACE-SWL	H-18-78	January 1981	Saline County, Unincorporated Areas

Table 28: Summary of Contracted Studies Included in this FIS Report (Coninued)

					,
Flooding Source	FIS Report Dated	Contractor	Number	Work Completed Date	Affected Communities
Otter Creek	08/15/1989	USACE-SWL	H-9-79	July 1988	City of Shannon Hills Saline County, Unincorporated Areas
Otter Creek Tributary	1/19/1996	USACE-SWL	H-18-78	July 1988	Saline County, Unincorporated Areas
Owen Creek	04/02/2003	USACE-SWL	H-18-78	April 2000	City of Bryant Saline County, Unincorporated Areas
Saline River	1/19/1996	USACE-SWL	H-18-78	January 1981	City of Benton
Salt Creek	06/15/1981	Garver & Garver, Inc.	H-4746	March 1980	City of Benton City of Haskell Saline County, Unincorporated Areas
Shannon Hills Tributary	08/15/1989	USACE-SWL	H-9-79	July 1988	City of Shannon Hills
Trace Creek	06/05/2020	Arkansas Natural Resources Commission	EMW-2014- CA-0163	October 1, 2015	City of Haskell Saline County, Unincorporated Areas
Trailer Park Ditch	1/19/1996	USACE-SWL	H-18-78	January 1996	City of Alexander City of Bryant
Upper Depot Creek	06/15/1981	Garver & Garver, Inc.	H-4746	March 1980	City of Benton
Willow Depot Creek	06/15/1981	Garver & Garver, Inc.	H-4746	March 1980	City of Benton Saline County, Unincorporated Areas
All Zone A streams	06/05/2020	Arkansas Natural Resources Commission	EMW-2014- CA-0163	October 1, 2015	City of Alexander City of Benton City of Bryant City of Haskell City of Trakswood Saline County, Unincorporated Areas Town of Bauxite

# 7.2 Community Meetings

The dates of the community meetings held for this Flood Risk Project and previous Flood Risk Projects are shown in Table 29. These meetings may have previously been referred to by a variety of names (Community Coordination Officer (CCO), Scoping, Discovery, etc.), but all meetings represent opportunities for FEMA, community officials, study contractors, and other invited guests to discuss the planning for and results of the project.

**Table 29: Community Meetings** 

Community	FIS Report Dated	Date of Meeting	Meeting Type	Attended By
Alexander, City	06/05/2020	04/23/2013	Discovery	Arkansas Natural Resources Commission, the communities, and the study contractor
of		05/31/2016	Final CCO Meeting	FEMA, the communities, and the study contractor
Bauxite, City of	06/05/2020	05/31/2016	Final CCO Meeting	FEMA, the communities, and the study contractor
Benton, City of	06/05/2020	04/23/2013	Discovery	Arkansas Natural Resources Commission, the communities, and the study contractor
		05/31/2016	Final CCO Meeting	FEMA, the communities, and the study contractor
Bryant, City of	06/05/2020	04/23/2013	Discovery	Arkansas Natural Resources Commission, the communities, and the study contractor
		05/31/2016	Final CCO Meeting	FEMA, the communities, and the study contractor
Haskell, City of	06/05/2020	04/23/2013	Discovery	Arkansas Natural Resources Commission, the communities, and the study contractor
•		05/31/2016	Final CCO Meeting	FEMA, the communities, and the study contractor
Shannon Hills, City of	06/05/2020	05/31/2016	Final CCO Meeting	FEMA, the communities, and the study contractor
Traskwood, City of	06/05/2020	05/31/2016	Final CCO Meeting	FEMA, the communities, and the study contractor
		04/23/2013	Discovery	Arkansas Natural Resources Commission, the communities, and the study contractor
Saline County, Unincorporated Areas	06/05/2020	12/16/2015	Flood Study Review	Arkansas Natural Resources Commission, the communities, and the study contractor
		05/31/2016	Final CCO Meeting	FEMA, the communities, and the study contractor

### **SECTION 8.0 – ADDITIONAL INFORMATION**

Information concerning the pertinent data used in the preparation of this FIS Report can be obtained by submitting an order with any required payment to the FEMA Engineering Library. For more information on this process, see <a href="https://www.fema.gov">www.fema.gov</a>.

The additional data that was used for this project includes the FIS Report and FIRM that were previously prepared for Saline County (FEMA 2012).

Table 30 is a list of the locations where FIRMs for Saline County can be viewed. Please note that the maps at these locations are for reference only and are not for distribution. Also, please note that only the maps for the community listed in the table are available at that particular repository. A user may need to visit another repository to view maps from an adjacent community.

**Table 30: Map Repositories** 

Community	Address	City	State	Zip Code
Alexander, City of	Municipal Complex, 15605 Alexander Road	Alexander	AR	72002
Bauxite, Town of	City Hall, 6055 Stanley Circle	Bauxite	AR	72011
Benton, City of	Municipal Complex, 114 South East Street	Benton	AR	72015
Bryant, City of	Central Public Safety Facility, 312 Roya Lane	Bryant	AR	72022
Haskell, City of	Haskell City Hall, 2520 Highway 229	Benton	AR	72015
Saline County Unincorporated Areas	Saline County Complex, 215 North Main Street Suite 7	Benton	AR	72015
Shannon Hills, City of	City Hall, 10401 High Road East	Shannon Hills	AR	72103
Traskwood, City of	Community Center, 212 Main Street	Traskwood	AR	72167

The National Flood Hazard Layer (NFHL) dataset is a compilation of effective FIRM Databases and LOMCs. Together they create a GIS data layer for a State or Territory. The NFHL is updated as studies become effective and extracts are made available to the public monthly. NFHL data can be viewed or ordered from the website shown in Table 31.

Table 31 contains useful contact information regarding the FIS Report, the FIRM, and other relevant flood hazard and GIS data. In addition, information about the State NFIP Coordinator and GIS Coordinator is shown in this table. At the request of FEMA, each Governor has designated an agency of State or territorial government to coordinate that State's or territory's NFIP activities. These agencies often assist communities in

developing and adopting necessary floodplain management measures. State GIS Coordinators are knowledgeable about the availability and location of State and local GIS data in their state.

**Table 31: Additional Information** 

FEMA and the NFIP					
FEMA and FEMA Engineering Library website	www.fema.gov/national-flood-insurance-program-flood-hazard-mapping/engineering-library				
NFIP website	www.fema.gov/national-flood-insurance-program				
NFHL Dataset	msc.fema.gov				
FEMA Region VI	Federal Emergency Management Agency, FRC 800 North Loop 288, Denton, TX 76209-3698 (940) 898-5399				
Other Federal Agencies					
USGS website	www.usgs.gov				
Hydraulic Engineering Center website	www.hec.usace.army.mil				
State Agencies and Organizations					
State NFIP Coordinator	Whit Montague, CFM Arkansas Soil & Water Conservation Commission 101 E. Capitol Avenue, Suite 350 Little Rock, AR 72201 (501) 682-1853 whitney.montague@arkansas.gov				
State GIS Coordinator	Shelby Johnson State Geographic Information Officer 124 West Capitol Avenue, Suite 990 Little Rock, AR 72201 Phone: 501-682-2767 <a href="http://www.gis.arkansas.gov">http://www.gis.arkansas.gov</a>				

## **SECTION 9.0 – BIBLIOGRAPHY AND REFERENCES**

Table 32 includes sources used in the preparation of and cited in this FIS Report as well as additional studies that have been conducted in the study area.

**Table 32: Bibliography and Reference** 

Citation in this FIS	Publisher/ Issuer	Publication Title, "Article," Volume, Number, etc.	Author/Editor	Place of Publication	Publication Date/ Date of Issuance	Link
AGIO, 2015	Arkansas Geographic Information Office (AGIO)	Base Map data Aerial Photography	Arkansas Geographic Information Office (AGIO)	Little Rock, Arkansas	2015	http://gis.arkansas.gov
FEMA, 2012	Federal Emergency Management Agency (FEMA)	Flood Insurance Study, Saline County, Arkansas and Incorporated Areas	Federal Emergency Management Agency (FEMA)	Washington, D.C.	June 19, 2012	https://msc.fema.gov
FEMA, 2015	Federal Emergency Management Agency (FEMA)	National Flood Hazard Layer (NFHL)	Federal Emergency Management Agency (FEMA)	Washington, D.C.	December 2015	https://msc.fema.gov
FEMA, 2020	Federal Emergency Management Agency (FEMA)	Saline County PMR, 2020	Federal Emergency Management Agency (FEMA)	Washington, D.C.	2020	https://msc.fema.gov
TIGER, 2015	United States Department of Commerce, Bureau of the Census	2015 TIGER GIS data	United States Census Bureau	Washington, D.C.	2015	www.census.gov
USGS, 1989	United States Geological Survey (USGS)	USGS 7.5-Minute Series Topographic Maps	United States Geological Survey (USGS)	Reston, VA	1989	www.usgs.gov

**Table 32: Bibliography and Reference** 

Citation in this FIS	Publisher/ Issuer	Publication Title, "Article," Volume, Number, etc.	Author/Editor	Place of Publication	Publication Date/ Date of Issuance	Link
USGS, 2006	United States Geological Survey (USGS)	National Hydrography Dataset	United States Geological Survey (USGS)	Reston, VA	2006	http://nhd.usgs.gov
USGS, 2014	United States Geological Survey (USGS)	USGS LiDAR Data for Arkansas Natural Resources Commission	United States Geological Survey (USGS)	Reston, VA	2014	https://datagateway.nrcs. usda.gov